

A Letter Of Recommendation From US Berry Global Company



485 Brooke Road

Winchester

Virginia, 22603

USA

11/24/22,

Hebei Jiutai environmental protection equipment LTD

Botou Industrial Zone, Changzhou City, Hebei Province China

Dear Mr. Sun Chao,

Our company, recently purchased fifty sock filters from Mrs. Aimee Song. I find it necessary to inform you regarding your product, in addition to your excellent employees and staff. Namely, Mrs. Song for her professionalism and customer dedication. The product was custom made for our application. I received it yesterday and it was perfect. The quality and workmanship are outstanding.

After reviewing your equipment, I can see why it works so well. The design is of the highest efficiency. I have maintained equipment of this nature for 48 years and I must say it is very impressive.

Due to the type of material used in the filters, it will afford us the opportunity to keep our machines running much longer before cleaning, saving our company thousands of dollars in loss time maintenance. We look forward working with Mrs. Song and please communicate our happiness to your employees. We do appreciate their hard work and efforts that go into this product.

Respectively,

Tim W

CDO / Technical Specialist

540-313-2079

Berry Global

<https://www.berryglobal.com/en/>



Winchester, VA Facility



CATALOGUE

HEBEI JIUTAI ENVIRONMENTAL PROTECTION EQUIPMENT

河北玖泰环保设备有限公司

HEBEI JIUTAI ENVIRONMENTAL PROTECTION EQUIPMENT CO.,LTD.



LET THE ENVIRONMENT
RETURN TO NATURE



LET THE ENVIRONMENT
RETURN TO NATURE



Hebei Jiutai Environmental Protection Equipment Co., Ltd. Specializes in research and development of a variety of environmental protection equipment and accessories including Dust removal equipment, Deodorizing equipment, polishing platform and so on. (The volume of all devices supports customizable)

APPLICATION FIELD

Mainly used in steel works, chemical plants, coking, asphalt mixing plant, cement and other production sites. Powder factory, electronic industry dust control and purification collection.



CERTIFICATE



DUST COLLECTION MACHINE



- **Product name:** mT-24
- **Product size:** 4500*2300*5000
- **Element size:** 325*1500mm
- **Standard fan:** 4-72-6A 22KW
- **Filtration area:** 432m²
- **Standard voltage:** 380V
- **Application:**
Apply to ceramics, chemical industry, grain processing, machinery manufacturing, mining and Cement factory, furniture factory, tea factory, jewelry factory; Suitable for collecting fine, dry and non-fibrous dust.



- **Product size:** 1500*1400*1800
- **Filter drum specification:** 325*660mm
- **Standard fan:** 4-72-3.2A 2.2KW
- **Processing air volume:** 2000m³/h
- **Standard voltage:** 380V
- **Application:**
Apply to Cement factory, furniture factory, tea factory, jewelry factory, mining and other industries; Suitable for collecting fine, dry and non-fibrous dust. The small dust collector is suitable for grinding, mixing, cutting, drilling, packaging, powder input, cutting, grinding and other environments.



- **Product name:** mc-64
- **Product size:** 2200*1900*4800
- **Filter bag specification:** 133*2000mm
- **Standard fan:** 4-72-4.5A 7.5KW
- **Standard voltage:** 380V
- **Application:**
Apply to ceramics, chemical industry, grain processing, machinery manufacturing, mining and Cement factory, furniture factory, tea factory, jewelry factory; Suitable for collecting fine, dry and non-fibrous dust.

Notice: The dimensions of all the above products support customization

DUST COLLECTION MACHINE



- **Product name:** MC-36
- **Product size:** 1800*1500*4200
- **Filter bag specification:** 133*2000mm
- **Standard fan:** 4-72-3.6A 4KW
- **Filtration area:** 28.8m²
- **Standard voltage:** 380V
- **Application:** Apply to Cement factory, furniture factory, tea factory, jewelry factory, mining and other industries; Suitable for collecting fine, dry and non-fibrous dust.



- **MODEL:** JT-XF-700 5.5KW
- **Air volume:** 7000M³/H
- **MODEL:** JT-XF-700 7.5KW
- **Air volume:** 8500M³/H
- **MODEL:** JT-XF-2-700 11KW
- **Air volume:** 12200M³/H
- **MODEL:** JT-XF-2-700 15KW
- **Air volume:** 14600M³/H



- **Product name:** mc-120
- **Product size:** 3000*2200*5200
- **Filter bag specification:** 133*2000mm
- **Standard fan:** 4-72-5A 15KW
- **Filtration area:** 96m²
- **Standard voltage:** 380V
- **Application fields:** iron and steel metallurgy, non-ferrous metallurgy, construction cement, mechanical casting, grain and light industry, Cement factory, furniture factory, tea factory, jewelry factory.

Notice: The dimensions of all the above products support customization

DUST COLLECTION MACHINE



- **Product name:** mc-200
- **Product size:** 4500*2200*5500
- **Filter bag specification:** 133*2000m
- **Standard fan:** 4-72-6A 22KW
- **Filter area:** 160m²-200m²
- **Standard voltage:** 380V
- **Application fields:** Applicable to ceramic, asphalt factory, chemical industry, grain processing, machinery manufacturing, mine cement factory, furniture factory, tea factory, jewelry factory; Suitable for fine, dry, non - fibrous dust collection.



- **Product name:** mc-500
- **Product size:** (customizable)
- **Filter bag specification:** 133*2500mm
- **Standard fan:** 4-68-10D55KW
- **Filtration area:** 500m²
- **Standard voltage:** 380V
- **Application fields:** Applicable to ceramic, asphalt factory, chemical industry, grain processing, machinery manufacturing, mine cement factory, furniture factory, tea factory, jewelry factory; Suitable for fine, dry, non - fibrous dust collection.



- **Product name:** mc-480
- **Product size:** 8200*2600*7000
- **Filter bag specification:** 133*2500mm
- **Standard fan:** 4-68-10C 55KW
- **Filtration area:** 480m²
- **Standard voltage:** 380V
- **Application fields:** Applicable to ceramic, asphalt factory, chemical industry, grain processing, machinery manufacturing, mine cement factory, furniture factory, tea factory, jewelry factory; Suitable for fine, dry, non - fibrous dust collection.

Notice: The handling air volume of all equipment support customized


DUST COLLECTION MACHINE

If you don't know the Air Volume, You can refer to Here

Model	Wind speed	Filtration Area	Air volume	Filter bag size	filter bags quantity	Matched fan
Mc-120	1.0-1.5m/min	96m ²	7768-15200m ³ /h	φ133×2000mm	120 PCS	4-72-5A 11KW
Mc-140	1.0-1.5m/min	112m ²	7728-15200m ³ /h	φ133×2000mm	140 PCS	4-72-5A 15KW
Mc-240	1.0-1.5m/min	192m ²	13300-24500m ³ /h	φ133×2000mm	240 PCS	4-72-6A 22KW
Mc-320	1.0-1.5m/min	320m ²	21830-38200m ³ /h	φ133×2500mm	320 PCS	4-68-8C 37KW
Mc-500	1.0-1.5m/min	500m ²	31033-56715m ³ /h	φ133×2500mm	500 PCS	4-68-10C 45KW
Mc-580	1.0-1.5m/min	580m ²	35400-61000m ³ /h	φ133×2500mm	580 PCS	4-68-10D 55KW

Machine Composition Diagram


Product Accessories

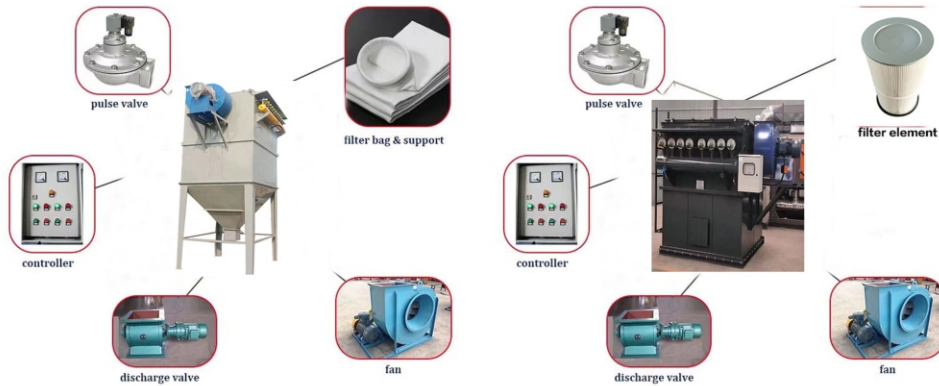

Overseas Use Site



GRINDING PLATFORM MACHINE

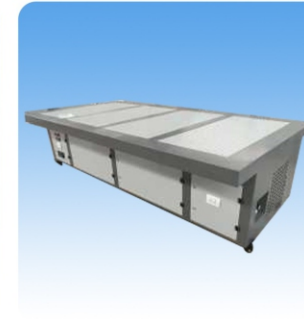

Model	AirVolume(m ³ /h)	Power	Equipment Size(MM)	Filter element Size(MM)
JT-1	3000	2.2KW	1200×1200×1600	320×500
JT-2	3000	2.2KW	1500×1200×1600	320×500
JT-3	5000	2.2KW	2000×1200×1600	320×500

Support For Power and Size Customization

Application:
Suitable for grinding wood products, metal products, chemical products, etc. The utility model has the advantages of convenient operation, energy saving and environmental protection, good dust removal effect, etc

WELDING PURIFIER MACHINE




One arm and two arms

Can be moved to any corner



As a manufacturer,
we have a price advantage

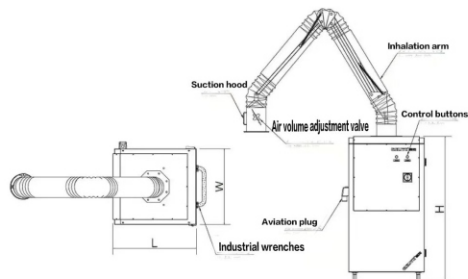


DRAWING

Model	Air Volume	Equipment Size(MM)	Power	Arw	Arw length
HY-1	1500	480 × 480 × 900	1.1kw	1	2M
HY-1	1500	500 × 700 × 1000	1.1kw	1	2M
HY-1	2400	480 × 480 × 900	2.2kw	1	2M
HY-1	2400	500 × 700 × 1000	2.2kw	1	2M
HY-1	3500	700 × 800 × 1100	3kw	1	2M
HY-1	5000	800 × 850 × 1300	4KW	1	2M
HY-2	3000	680 × 520 × 1050	2.2kw	2	3M
HY-2	3000	750 × 800 × 1100	2.2kw	2	3M
HY-2	3500	680 × 520 × 1050	3.0KW	2	3M
HY-2	3500	750 × 800 × 1100	3.0KW	2	3M
HY-2	5000	800 × 850 × 1300	4.0KW	2	3M

Notice : Power and air volume support customization

CYCLONE DUST COLLECTOR

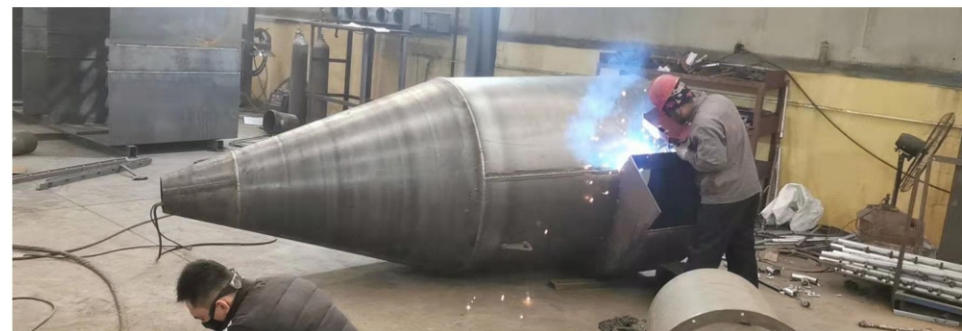


Cyclone dust collector specification table

Model	Air Volume(m³/h)	Equipment Size(mm)	Platethickness(mm)	Equipmentweight(kg)
JT-1	2500	φ550×2100mm	General 3mm	400-700
JT-2	3500	φ620×2100mm		
JT-3	4500	φ750×2800mm		
JT-4	6000	φ800×2900mm		
JT-5	8000	φ950×3600mm		
JT-6	10000	φ1050×3700mm		
JT-7	12000	φ1200×4500mm		
JT-8	15000	φ1300×4600mm		
JT-9	20000	φ1500×5200mm		
JT-10	30000	φ1800×4000mm		
Air Volume and Equipment Size Support Customized				

Application: metallurgy, casting, building materials, chemical food, cement and other industries.

EXHAUST REMOVAL EQUIPMENT

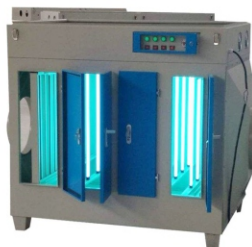

- **Name:** UV photooxygen purifier
- **Shell material:** carbon steel or stainless steel
- **Can handle gas:** odorous gas and pungent odor
- **Areas of application:** paint coating, chemical industry, paper industry, pharmaceutical industry, tire and rubber factories, automobile production, wastewater treatment, sludge, garbage disposal waste gas, waste gas treatment of leather industry, printing and spices production, feed and farms and the tobacco industry etc many fields stench of poisonous and harmful gases, odors and processing



- **Name:** Catalytic combustion equipment
- **Application:**
 1. It can be used to purify organic solvent (benzene, alcohol, ester, phenol, ether, alkane and other mixed organic waste gas);
 2. It is applicable to the purification of organic waste gas in such industries as wire, cable, enameled wire, machinery, electric motor, chemical industry, instrument, automobile, bicycle, motorcycle, engine, rubber belt, plastic, household appliances, etc.
 3. can be used for a variety of drying channels, can printing and surface spraying, ink, mechanical and electrical insulation treatment, leather shoes viscose drying line, purification of organic waste gas produced in each process.





- **Name:** PPC spray tower
- **Shell material:** PP, carbon steel, stainless steel or fiberglass
- **Treatable gas:** acid, alkaline.
- **Application:**
 1. Municipal industry: Applicable to chemical plants, waste transfer stations, municipal waste treatment plants, waste treatment plants, municipal sewage treatment plants, sewage pumping stations, grille rooms, sludge ponds, sludge treatment rooms, etc. Generated H₂S, mercaptan, sulfide, ammonia and amines and other malodorous bodies;
 2. Factory enterprises: suitable for asphalt, rubber factory, plastic granulator factory, paper factory, food factory, tobacco, printing, farm, chemical industry and production process to produce benzene, ester, alcohol, ketone, aldehyde, phenolic gasoline and other occasions.

HODEL	Size	Air Volumem ³ /h	configuration table
JT-01	φ1000 × 3000	5000	water pump : 1.1KW Two layers spray, two layers filler
JT-02	φ1000 × 3500	6000	water pump : 1.5KW Two layers spray, two layers filler
JT-03	φ1200 × 3000	7000	water pump : 1.5KW Two layers spray, two layers filler
JT-04	φ1200 × 3500	8000	water pump : 1.5KW Two layers spray, two layers filler
JT-05	φ1500 × 2500	10000	water pump : 1.5KW Two layers spray, two layers filler
JT-06	φ1500 × 3000	13000	water pump : 2KW Two layers spray, two layers filler
JT-07	φ1500 × 3500	15000	water pump : 1.5KW Two layers spray, two layers filler

Notice: The dimensions of all the above products support customization

DUSTING ACCESSORIES

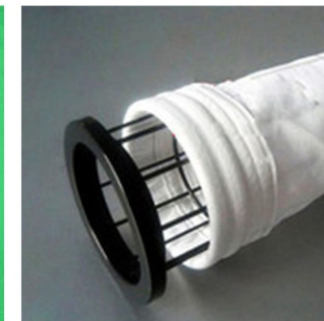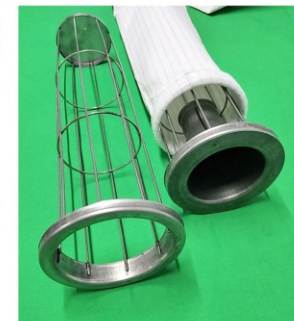

- **Name:** filter bag (filter bag cage)
- **Size:** customizable
- **Filter bag material:** polyester knitted felt (can be customized according to requirements)
- **Application:** corrosive gas soot has great harm and serious environmental pollution does not meet the national emission standard. Such as steel works, chemical plants, coking, asphalt mixing plant, building materials cement and other production sites. Powder factory, electronic industry dust control and purification collection.



- **Name:** Magnetic valve
- **Size:** can be customized according to requirements
- **Standard material:** Carbon steel (Q235)
- **Application:** temperature -10+55°C; No more than 85% relative humidity. Working medium: clean air, dew point -20°C. Air source pressure: 0.3-0.6mpa. Working voltage and current of electromagnetic pilot valve: DC24V, 0.8A; AC220V, 0.14A; AC110V, inlet of 0.3a pulse valve is connected with air package, and outlet is connected with spray blowpipe. When connecting, teflon raw material belt should be used between threads to ensure sealing.



DUSTING ACCESSORIES



- **Name:** Screw conveyor
- **Specification size:** 219 (customized)
- **Standard material:** Carbon steel (Q235)
- **Application:**
Screw conveyor is mainly used to transport all kinds of powdery, granular, small materials, the bulk materials are grains, beans, flour and other food products, cement, clay, sand and other building materials, salt, alkali, chemical fertilizer and other chemicals, as well as coal, coke, ore and other bulk goods



- **Name:** Centrifugal fan
- **Air volume support customization**
- **Application factory:**
Ventilation, dust removal and cooling of factories, mines, tunnels, cooling towers, ships and buildings.



THE EXHIBITION SCENE




EQUIPMENT AND OFFICE AREA






From American customer

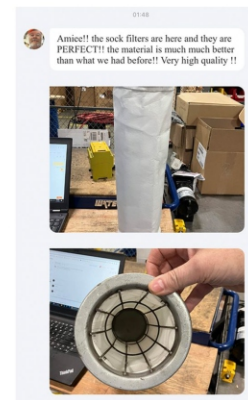

From Canada Customer




From Saudi customer

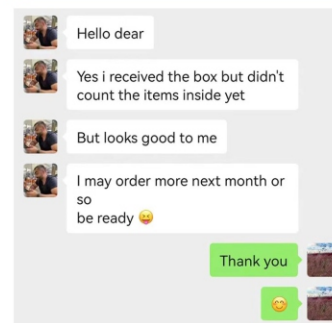


From Philippines Customer



From German customer

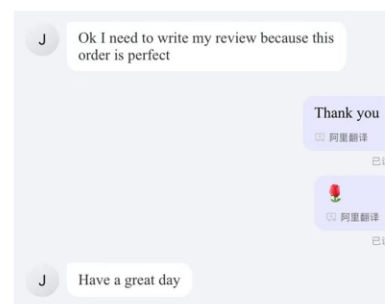

AMS-KSEIndonesia Corp

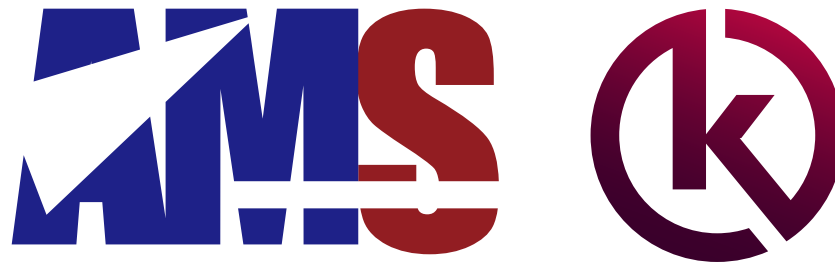

PT. APINDO MITRA SELARAS

Serang Office :

Komp. Lebak Indah Griya Asri
Blok D4-D5 No.17 & No.05
Waringin Kurung - Kramatwatu
Serang, Banten
42161

Cilegon Office :

Jl. Raya Pondok Cilegon Indah
Ruko Cilegon City Square Blok I No.7
Kedaleman - Cibeber
Cilegon, Banten
42422

aris@kseindonesia.com - sales@kseindonesia.com - cso@kseindonesia.com

www.kseindonesia.com