

意创达照明产品手册
ETENDA LIGHTING PRODUCT MANUAL

✉ sales@kseindonesia.com

🌐 www.kseindonesia.com

☎ +62 821 2222 8303

Komplek Perum. Lebak Indah Griya Asri Blok D4/17 - D5/05
RT.006 RW.007 Lebakwana, Kramatwatu, Serang - Banten Indonesia 42161

COMPANY PROFILE

Shenzhen Etenda Lighting Co., LTD. was founded in December 2007. The company produces and exports a variety of LED lights for more than 13 years.

ETENDA has the highest technology and state-of-the-art production facilities, covering an area of more than 25000 m², with more than 300 employees and an automated production line, which can produce 30000 LED floodlights every day. With the concept of high efficiency, energy saving and environmental protection, the company is committed to theoretical innovation, technological innovation and structural innovation.



意创达照明拥有最高科技和最先进的生产设施，占地面积超过25,000m²，拥有300多名员工，拥有自动化生产线，每天可生产30,000盏太阳能泛光灯和6,000盏太阳能路灯和壁灯。为了满足需求。公司以高效节能，绿色环保的理念，致力于理论创新，技术创新和结构创新，引领照明行业，加速产品升级，为建设和谐的绿色地球企业贡献社会责任。



DIRECTORY

LDE FLOOD LIGHT

- JG flood light
- FKSD flood light
- FD Lens floodlight
- 104- FLOOD Light
- PAD-CS IPAD linear flood light
- PAD-CYTBIPAD linear flood light
- JG flood light
- FKSD flood light
- FD Lens floodlight
- 104- FLOOD Light
- PAD-CS IPAD linear flood light
- PAD-CYTBIPAD linear flood light
- IPAD linear flood light
- MINI SMD Floodlight
- Premier smd flood light
- mate Flood Light
- Mini3 led flood light
- FW-3 Flood Light
- Tpg-flood Light
- JGX- Flood Light
- XM flood light
- BB led flood light
- Portableapple floodlight
- FW-3 Flood Light
- Construction site high bay light
- LK RGB flood light

MINING LAMP

- UFO Premier High Bay Light
- UFO LED High Bay Light

LED STREET LIGHT

- Sword street light
- XZD Street Light
- HZ-2 Street Light
- Modules LED street light
- CL Street Light
- Sensor Shoe box Street Light
- QDD Street Light
- ZL street light

JGA(JGB) FLOOD LIGHT



YCD-JGA



YCD-JGB

FKSD FLOOD LIGHT



(Model) Name	(YCD-JGA-200) JG flood light
Power	200W / 150W / 100W / 50W
Light source	3030 chip
Voltage	AC85-265V
Light efficiency	>=95 lm/W
illumination angle	120°
Material	Die-Cast Aluminum+PC (Die-Cast Aluminum+Toughened glass)
Protection level	IP65 (4KV)
Colour	Light grey (dark grey)
Lamp body size	YCD-JGA 365*295*45mm / 325*245*40mm / 265*212*40mm / 227*170*35mm YCD-JGB 365*295*45mm / 325*245*40mm / 265*212*40mm / 227*170*35mm
Warranty	2years

(Model) Name	(ETD-FKSD- 200W) FKSD flood light
Power	200W / 150W / 100W / 50W / 30W / 20W / 10W
Light source	SMD 2835 chip
Voltage	AC85-265V
Light efficiency	>=100lm/W
illumination angle	120°
Color temperature	3000K-6500K
Material	Die-cast aluminum+Toughened glass
Protection level(Anti surge)	IP66(4KV)
Colour	Black
Lamp body size	330*268*30mm /300*245*30mm / 218*170*30mm / 158*138*30mm / 132*110*30mm / 117*98*30mm
Warranty	2years



200W

150W

100W

50W



200W

150W

100W

50W



Other specification
sales@kseindonesia.com





FD LENS FLOODLIGHT



104- FLOOD LIGHT



(Model) Name	(ETD-FD-300W) FD Lens floodlight
Power	300W / 200W / 150W / 100W / 50W
Light source	SMD 3030
Voltage	AC85-265V
Light efficiency	≥100lm/W
illumination angle	120°
Color temperature	3000K-6500K
Material	Die-cast aluminum+PC
Protection level(Anti surge)	IP67(4KV)
Colour	GREY
Lamp body size	370*395*40mm /300*350*40mm / 260*305*40mm / 225*260*35mm / 185*210*35mm
Warranty	2years



Other specification
sales@kseindonesia.com



(Model) Name	(ETD-JG200) 104- FLOOD Light
Power	200W / 150W / 100W / 50W / 30W
Light source	SMD3030
Voltage	AC85V-265V
Light efficiency	≥95 lm/W
illumination angle	120°
Color temperature	6000K-6500K
Material	Die-Cast Aluminum+Toughened glass
Protection level	IP66 (KV Surge: 3KV)
Colour	grey
Lamp body size	344x316x31mm / 293x272x31mm / 274x238x29mm / 219x184x290mm / 182x159x29mm



Other specification
sales@kseindonesia.com



IPAD LINEAR FLOOD LIGHT



YCD-PAD-600



MINI SMD FLOODLIGHT




(Model) Name	(YCD-PAD-600) IPAD linear flood light
Power	600W / 500W / 400W / 300W / 200W / 150W / 100W / 75W / 50W / 30W / 20W / 10W
Light source	San'an 2835s
Voltage	AC 220V
Light efficiency	≥ 95 lm/W
illumination angle	120°
Material	Die-Cast Aluminum+Toughened glass
Protection level	IP66
Colour	White
Lamp body size	696*328*43mm / 592*328*39mm / 488*328*39mm / 433*328*38mm / 378*287*37mm / 334*237*37mm 269*216*36mm / 237*184*34mm / 204*152*34mm / 160*126*30mm / 118*98*30mm / 105*90*30mm
Warranty	2years


(Model) Name	(YCD-MINI-200) MINI SMD Floodlight
Power	200W / 150W / 100W / 50W / 30W / 20W / 10W
Light source	Epistar
Voltage	AC85-265V/220V/110V
Light efficiency	≥ 95 lm/W
illumination angle	120°
Material	Die-cast aluminum+Frosted tempered glass
Protection level	IP65
Colour	GREY
Lamp body size	295*382*45mm / 344*265*45mm / 309*240*43mm / 239*201*42mm 199*170*42mm / 157*142*42mm / 134*105*35mm
Warranty	2years



MINI3 LED FLOOD LIGHT

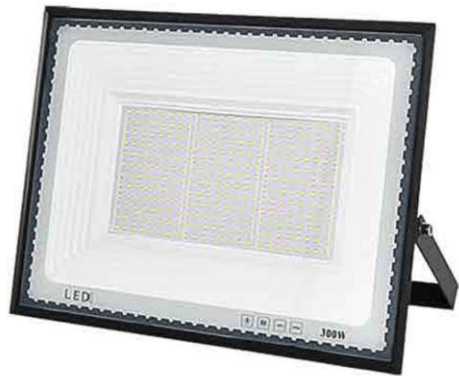

FW-3 FLOOD LIGHT

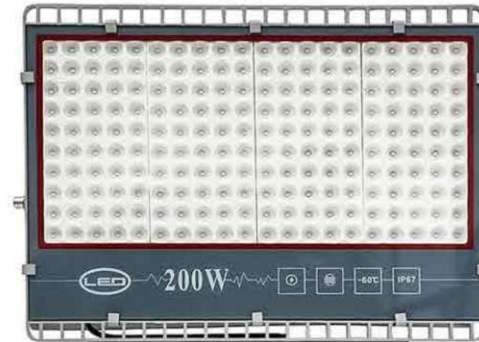

(Model) Name	(ETD-MN2-300W) Mini3 led flood light
Power	300W / 200W / 150W / 100W / 50W / 30W
Light source	Derunhaoda 2835
Voltage	175-240V
Light efficiency	≥90lm/W
illumination angle	120°
Color temperature	6000K-6500K
Material	Die-cast aluminum+Toughened glass
Protection level (Anti surge)	IP66(4KV)
Colour	Black
Lamp body size	370*280*40mm / 330*251*40mm / 294*220*39.5mm / 228*185*39.5mm / 190*156*39.5mm / 149*125*39.5mm
Warranty	2years




Other specification
[✉sales@kseindonesia.com](mailto:sales@kseindonesia.com)

(Model) Name	(FW3-200W) FW-3 Flood Light
Power	200W / 150W / 100W / 50W / 30W
Light source	SMD3030
Voltage	AC85V-265V
Light efficiency	100 lm/W
illumination angle	120°
Color temperature	3000K-6500K
Material	Die-cast aluminum+Toughened glass
Protection level(Anti surge)	IP66(4KV)
Colour	Dark Grey
Lamp body size	385*65*520cmm / 405*59*390mm / 300*55*345mm / 280*55*260mm / 190*45*250mm
Warranty	2years



Other specification
[✉sales@kseindonesia.com](mailto:sales@kseindonesia.com)

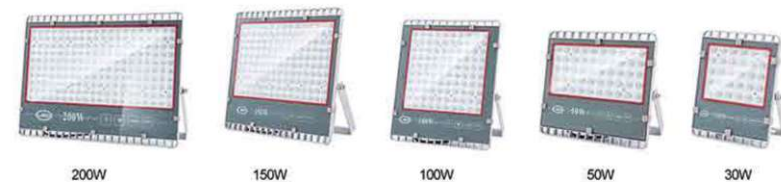



PREMIER SMD FLOOD LIGHT





MATE FLOOD LIGHT



(Model) Name	(YCD - HJG - 200W) Premier smd flood light
Power	200W / 150W / 100W / 50W / 30W / 20W
Light source	Epistar
Voltage	AC85-265V
Light efficiency	≥100 lm/W
illumination angle	120°
Color temperature	6000K-6500K
Material	Die-cast aluminum+Toughened glass
Protection level	IP65
Colour	Black
Lamp body size	340*310*85mm / 340*310*85mm / 280*250*70mm / 240*210*60mm / 190*170*50mm / 180*160*50mm
Warranty	2years

(Model) Name	(YCD-IPAD-200W) MATE Flood Light
Power	300W / 200W / 150W / 100W / 50W / 30W
Light source	San'an SMD
Voltage	AC165-240V
Light efficiency	> 120 lm/W
illumination angle	120°
Color temperature	6000K-6500K
Material	Die-Cast Aluminum + Toughened Glass
Protection level	IP66
Colour	Black
Lamp body size	445*50*346mm / 365*45*295mm / 325*40*245mm / 265*40*212mm / 227*35*117 / 180*30*130
Warranty	2years



Other specification
sales@kseindonesia.com

Other specification
sales@kseindonesia.com



200W 150W 100W 50W 30W



300W 200W 150W 100W 50W

IPAD LINEAR FLOOD LIGHT



YCD-PAD-CS-300S



YCD-PAD-RGB-100

(Model) Name	(YCD-PAD-CS-300S) (YCD-PAD-RGB-100) IPAD linear flood light
Power	300W / 200W / 150W / 100W / 50W / 30W / 20W / 10W
Light source	San'an 2835s
Voltage	AC175V-240V / 220V / 110V
Light efficiency	>95 lm/W
illumination angle	120°
Material	Die-Cast Aluminum+Toughened glass
Protection level	IP66
Colour	White
Lamp body size	445*335*5.5mm / 390*290*55mm / 320*550mm / 320*550mm / 270*210*40mm 200*160*40mm / 160*120*33mm / 160*120*33mm / 105*85*30mm
Warranty	2years



IPAD CYT LINEAR FLOOD LIGHT



YCD-PAD-CYTA-200



YCD-PAD-CYTB-200

(Model) Name	(YCD-PAD-CYTA-200) (YCD-PAD-CYTB-200) IPAD linear flood light
Power	200W / 100W / 50W / 30W / 20W / 10W
Light source	San'an 2835s
Voltage	AC165V-265V
Light efficiency	>95 lm/W
illumination angle	120°
Material	Stamping iron+Toughened glass
Protection level	IP65
Colour	White
Lamp body size	275*210*23mm / 235* 180*23mm / 195* 150*23mm / 155* 120*23mm 120*95*23mm / 105*85*23mm
Warranty	2years



TPG-FLOOD LIGHT



JGX-FLOOD LIGHT



(Model) Name	(ETD-MN2-300W) TPG-flood Light
Power	300W / 200W / 150W / 100W / 50W / 30W
Light source	Derunhaoda 2835
Voltage	AC220-240V
Light efficiency	≥50lm/W
illumination angle	120°
Color temperature	3000K-6500K
Material	Die-cast aluminum+Toughened glass
Protection level	IP66
Colour	Black
Lamp body size	405*35*305mm/350*35*265mm / 300*35*210mm / 245*35*175mm / 210*35*155mm / 195*35*140mm
Warranty	2years



Other specification
sales@kseindonesia.com

(Model) Name	(JGX-400W) JGX- Flood Light
Power	400W / 300W / 200W / 100W
Light source	COB
Voltage	AC200V-240V
Light efficiency	100 lm/W
illumination angle	120°
Color temperature	3000K-6500K
Material	Die-cast aluminum+Toughened glass
Protection level(Anti surge)	IP65(3KV)
Colour	Black
Lamp body size	430*280*250mm / 340*240*25mm / 280*230*25mm / 220*187*25mm
Warranty	2years



Other specification
sales@kseindonesia.com





XM FLOOD LIGHT



BB FLOOD LIGHT



(Model) Name	(YCD-XM-300W) XM flood light
Power	300W / 200W / 150W / 100W / 50W
Light source	300 / 200 / 150 / 100 / 50pcs Lens bead
Voltage	AC165-265V
Light efficiency	100 lm/W
illumination angle	120°
Color temperature	6000K-6500K
Material	Die-cast aluminum+PC
Protection level	IP65 (KV Surge: 4000KV)
Colour	Black and white
Lamp body size	360*350*50mm / 330*320*50mm / 290*280*50mm / 238*228*35mm / 198*188*46mm
Warranty	2years

(Model) Name	(YCD-JZ-200W) BB flood light
Power	800W / 600W / 500W / 400W / 300W / 200W / 150W / 100W
Light source	San'an chip
Voltage	AC85-265V
Light efficiency	90 lm/W
illumination angle	120°
Color temperature	6000K-6500K
Material	Die-cast aluminum+Toughened glass
Protection level	IP65
Colour	GREY
Lamp body size	810*325*20mm / 670*325*20mm / 600*325*20mm / 525*325*19.5mm / 450*325*19.5 / 425*325*19.5mm / 425*325*19.5mm / 385*285*19.5mm
Warranty	2years



Other specification
sales@kseindonesia.com



Other specification
sales@kseindonesia.com

PORTABLEAPPLE FLOODLIGHT



FW-3 FLOOD LIGHT



(Model) Name	(E-F-100) Portableapple floodlight
Power	300W / 200W / 100W / 50W
Light source	Epistar 2835
Voltage	AC85-265V
Luminous flux	100 lm/w
illumination angle	120°
Color temperature	6000K - 6500K
Material	Die-cast aluminum+Toughened glass
Protection level	IP66
Colour	Orange
Lamp body size	440*330*50mm / 380*280*40mm / 270*210*35mm / 210*160*28mm
	2years



(Model) Name	(ETD-TG3D-F7) FW-3 Flood Light
Power	450W / 300W / 200W / 150W / 100W / 80W / 50W
Light source	8C64P 32 / 8C48P 24 / 8C30P 15 / 8C24P 12 / 8C16P 8 / 8C12P 6 / 8C8P 4 SMD3030
Voltage	AC85V-265V
Light efficiency	100 lm/W
illumination angle	120°
Color temperature	3000K-6500K
Material	Die-cast aluminum+Toughened glass
Protection level(Anti surge)	IP65
Colour	Black
Lamp body size	585*569*70mm / 565*457*66mm / 470.5*360*60mm / 430.5*330*60mm / 402.5*295*60mm / 354.5*245*55mm / 310.5*220*50mm
Warranty	2years

Other specification
sales@kseindonesia.com

Other specification
sales@kseindonesia.com



CONSTRUCTION SITE HIGH BAY LIGHT



LK RGB FLOOD LIGHT



(Model) Name	(YCD-TD-2000W) Construction site high bay light
Power	2000W / 1500W / 1000W / 800W / 600W / 400W
Light source	LED Sanan 3030
Voltage	AC220V
Light efficiency	130 lm/W
illumination angle	120°
Color temperature	6000K-6500K
Material	Die-cast aluminum + tempered glass
Protection level	IP65
Colour	Black
Radiator Specifications	464*507mm / 369*367mm / 290*367mm / 290*311mm / 276*237mm / 276*237mm / 183*171mm / 183*171mm
Warranty	2years

(Model) Name	(YCD-LK- 50W) LK RGB flood light
Power	200W / 100W / 50W
Light source	San'an
Voltage	AC85-265V
Light efficiency	100 lm/W
illumination angle	120°
Color temperature	6000K-6500K
Material	Die-cast aluminum+Toughened glass
Protection level	IP66
Colour	Black / White
Lamp body size	310*255*50mm / 260*200*50mm / 210*175*50mm
Warranty	2years



Other specification
sales@kseindonesia.com



150W

100W

50W

150W

100W

50W



UFO PREMIER HIGH BAY LIGHT



UFO LED HIGH BAY LIGHT



(Model) Name	(UFO-GC-200W) UFO Premier High Bay Light
Power	200W / 150W / 100W / 50W
Light source	3030 lamp beads
Voltage	AC85-265V
Light efficiency	≥100lm/W
illumination angle	120°
Color temperature	6000K-6500K
Material	Die-cast aluminum+PC
Protection level	IP65
Colour	Black
Lamp body size	230*230*115mm / 290*290*115mm / 345*345*120mm / 400*400*120mm
Warranty	2years

(Model) Name	(ETD-UFO-200W) UFO LED High Bay Light
Power	200W / 100W / 50W
Light source	3030 lamp beads
Voltage	AC85V-265V
Light efficiency	≥120lm/W
illumination angle	90°
Color temperature	6000K-6500K
Material	Die-cast aluminum+PC
Protection level	IP65
Colour	Black
Lamp body size	φ360*187mm / φ310*175mm / φ270*167mm
Warranty	5years



Other specification
sales@kseindonesia.com

Other specification
sales@kseindonesia.com





SWORD STREET LIGHT



(Model) Name	(YCD-BJ-150) Sword street light
Power	200W / 150W / 100W / 50W / 30W / 20W
Light source	Epistar
Voltage	AC85-265V
Light efficiency	90-100 lm/W
illumination angle	120°
Color temperature	6000K-6500K
Material	Die-cast aluminum
Protection level	IP65
Colour	Black
Lamp body size	340*310*85mm / 340*310*85mm / 280*250*70mm / 240*210*60mm / 190*170*50mm / 180*160*50mm
Warranty	2years




Other specification
sales@kseindonesia.com



XZD STREET LIGHT



(Model) Name	(ET-XZD-150W) XZD Street Light
Power	200W / 150W / 100W / 50W / 30W
Light source	3030 LED Lamp
Voltage	AC85-265V
Light efficiency	≥100 lm/W
illumination angle	120°
Color temperature	6000K-6500K
Material	Die-Cast Aluminum
Protection level	IP65
Colour	Dark Grey
Lamp body size	620*220*75mm / 585*180*75mm / 465*165*65mm / 400*150*65mm / 325*115*55mm
Warranty	2years



Other specification
sales@kseindonesia.com





HZ-2 STREET LIGHT



(Model) Name	(HZ2-200) HZ-2 Street Light
Power	200W / 150W / 100W / 50W
Light source	200 / 150 / 100 / 50pcs SMD3030
Voltage	AC85V-265V
Light efficiency	100 lm/W
illumination angle	120°
Color temperature	3000K-6500K
Material	Die-cast aluminum
Protection level (Anti surge)	IP65 (5KV)
Colour	Dark Grey
Lamp body size	670*235*65mm / 575*200*65mm / 490*175*55mm / 450*145*45mm
Warranty	2years



Other specification
sales@kseindonesia.com



MODULES LED STREET LIGHT



(Model) Name	(YCD-MZ) Modules LED street light
Power	250W / 200W / 150W / 100W / 50W
Light source	Epistar 3030
Voltage	AC85-265V
Luminous flux	100 lm/w
illumination angle	120°
Color temperature	6000K - 6500K
Material	Die-cast aluminum+PC
Protection level	IP67
Colour	Gray
Lamp body size	700*280*90mm / 620*280*90mm / 540*280*90mm / 440*280*90mm / 390*280*90mm
Warranty	2years



Other specification
sales@kseindonesia.com





HZ-2 STREET LIGHT



(Model) Name	(HZ2-200) HZ-2 Street Light
Power	200W / 150W / 100W / 50W
Light source	200 / 150 / 100 / 50pcs SMD3030
Voltage	AC85V-265V
Light efficiency	100 lm/W
illumination angle	120°
Color temperature	3000K-6500K
Material	Die-cast aluminum
Protection level (Anti surge)	IP65 (5KV)
Colour	Dark Grey
Lamp body size	670*235*65mm / 575*200*65mm / 490*175*55mm / 450*145*45mm
Warranty	2years



Other specification
sales@kseindonesia.com



MODULES LED STREET LIGHT



(Model) Name	(YCD-MZ) Modules LED street light
Power	250W / 200W / 150W / 100W / 50W
Light source	Epistar 3030
Voltage	AC85-265V
Luminous flux	100 lm/w
illumination angle	120°
Color temperature	6000K - 6500K
Material	Die-cast aluminum+PC
Protection level	IP67
Colour	Gray
Lamp body size	700*280*90mm / 620*280*90mm / 540*280*90mm / 440*280*90mm / 390*280*90mm
Warranty	2years



Other specification
sales@kseindonesia.com





QDD STREET LIGHT



(Model) Name	(ETD-QDD-200) QDD Street Light
Power	200W / 150W / 100W / 50W
Light source	san'an chip
Voltage	AC85V-265V
Light efficiency	140 lm/W
illumination angle	120°
Color temperature	3000K-6500K
Material	Die-cast aluminum+PC
Protection level (Anti surge)	IP66(4KV)
Colour	Grey
Lamp body size	685*175*80mm / 590*160*60mm / 475*141*45mm / 410*120*40mm
Warranty	2years




Other specification
sales@kseindonesia.com



ZL STREET LIGHT



(Model) Name	(YCD-ZL-200W) ZL street light
Power	200W / 150W / 100W / 50W
Light source	san'an chip
Voltage	AC85-265V
Luminous flux	120 lm/w
illumination angle	120°
Color temperature	6000K - 6500K
Material	Die-cast aluminum+PC
Protection level	IP65 (4KV)
Colour	Gray
Lamp body size	655*235*90mm / 605*215*90mm / 505*195*77mm / 425*175*77mm
Warranty	2years

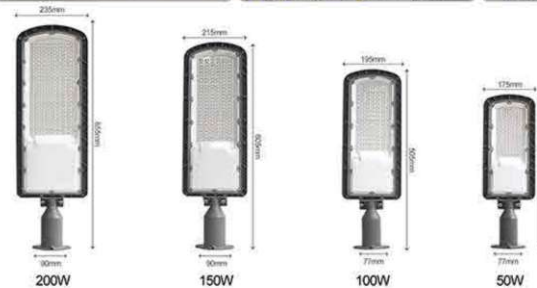

Other specification
sales@kseindonesia.com



FX STREET LIGHT



(Model) Name	(YCD-FX-200W) FX street light
Power	200W / 150W / 100W / 50W / 30W
Light source	Epistar 3030
Voltage	AC85-265V
Luminous flux	100 lm/w
illumination angle	120°
Color temperature	6000K - 6500K
Material	Die-cast aluminum+PC
Protection level	IP65 (5KV)
Colour	Gray
Lamp body size	700*280*90mm / 620*280*90mm / 540*280*90mm / 440*280*90mm / 390*280*90mm
	2years



Other specification
sales@kseindonesia.com