

AMS-KSEIndonesia Corp



PT. APINDO MITRA SELARAS

Serang Of fice :

Komp. Lebak Indah Griya Asri
Blok D4-D5 No.17 & No.05
Waringin Kuring - Kramatwatu
Serang, Banten
42161

Cilegon Of fice :

Jl. Raya Pondok Cilegon Indah
Ruko Cilegon City Square Blok I No.7
Kedaleman - Cibeer
Cilegon, Banten
42422

aris@kseindonesia.com - sales@kseindonesia.com - cso@kseindonesia.com


www.kseindonesia.com





► 目录

Company Introduction	1
Product Series intruduce	2
Sprocket type	3
链轮 ANSI 35-140 sprocket	4
联轴器 /Coupling	12
齿条 /Rack	14
齿轮 /Gear	15
正齿轮 A-B Spur gear	16
Transmission Chain.....	24
Transmission Chain Structure.....	25
A/B 系列滚子链条 -Short pitch precision roller chain	26
重载系列滚子链条 /Heavy duty series roller chain	32
A/B 系列直板链条 -A/B series roller chain with straight side plates	33
双节距输送链 /Double pitch conveyor chain	35
不锈钢滚子链条 /Stainless steel roller chain	36
不锈钢空心销轴链 /Stainless steel Hollow pin chain	37
空心销轴链 /Hollow pin chain	38
重载弯板传动链 /Heavy duty cranked-link transmission chain	41

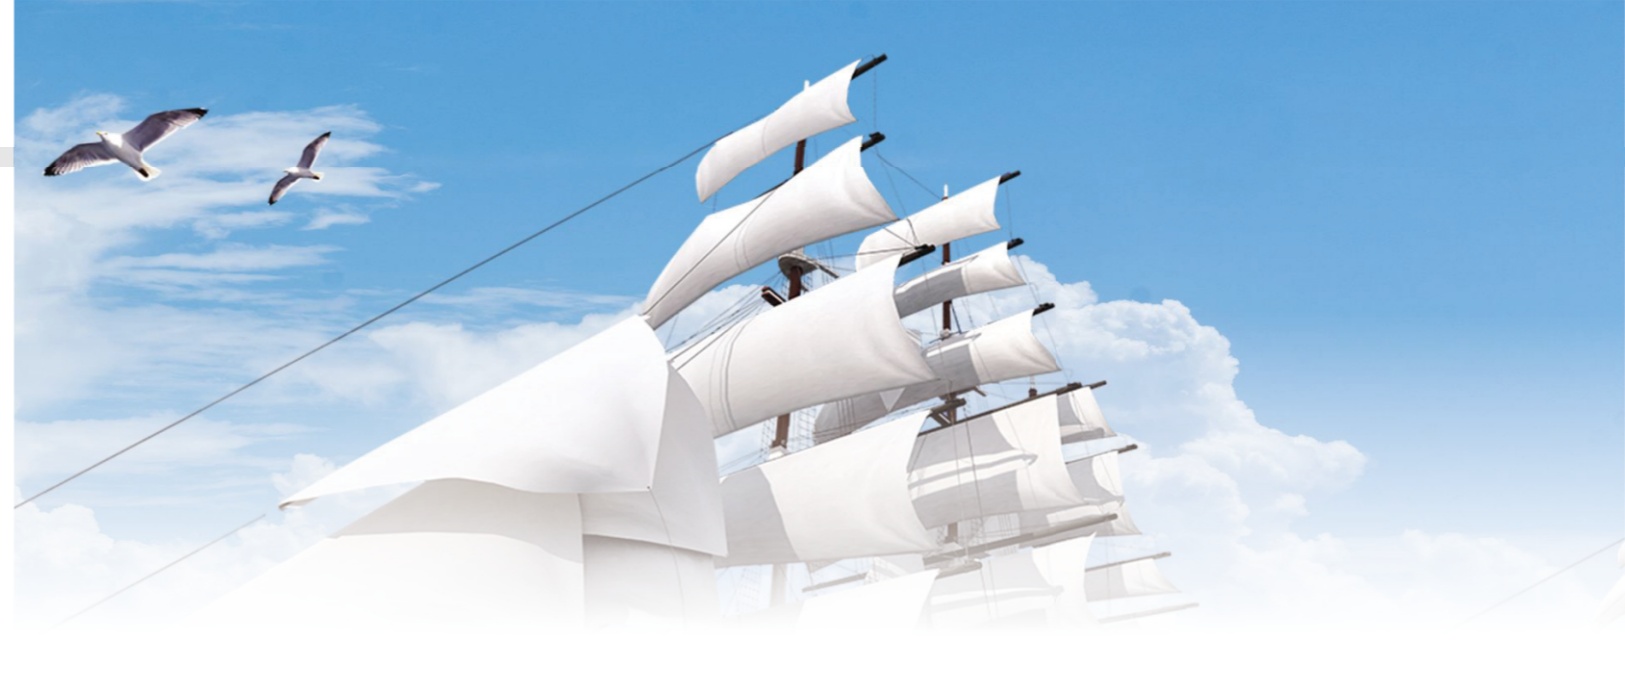

COMPANY INTRODUCTION

Our company is a family owned enterprise that specializes in the production, sales, and operation of standard and non-standard sprockets, gears, and other related products. The factory has a history of 18 years and is equipped with a set of advanced and complete production equipment, including sawing machines, CNC lathes, hobbing machines, punching machines, high-frequency machines, semi-automatic welding machines, more than 30 devices, as well as a production team with more than 20 years of experience in the industry.

Established its own self operated export business company in 2019. Nowadays, our supply chain has also been comprehensively expanded, providing standard and non-standard chains, bearings, synchronous pulleys and belt pulleys, and other products, providing customers with a complete one-stop service of products.

The company attaches great importance to the control of product quality, from material selection to production technology, and export packaging. We have been continuously improving and perfecting, and customizing high-quality services according to customer needs.

The products are exported to Europe, the United States, Canada, Australia, South Korea, Southeast Asia and other regions and countries, and have received widespread praise from customers. We have always been committed to maintaining good communication, deep cooperation, and creating a win-win situation with our customers.

Welcome customers and friends to enjoy our services. Your trust is the driving force to improve us.

► Product Series intruduce





► Sprocket type




Type A

Type B

Type C

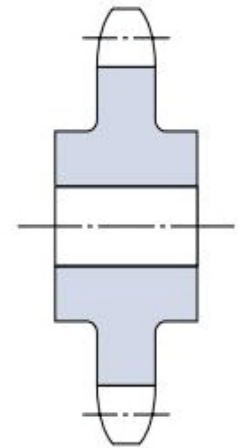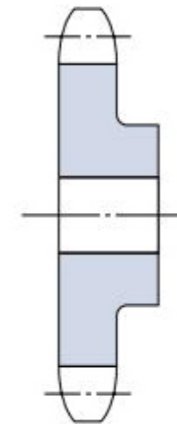

链轮 /Sprocket 35 Sprocket

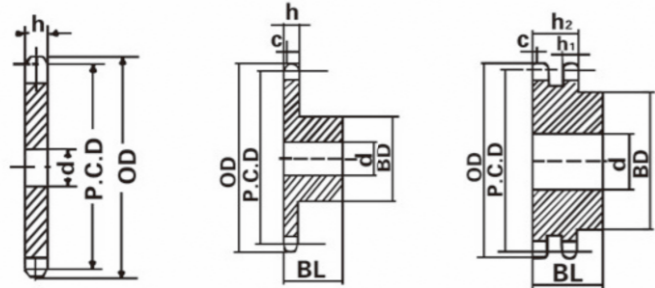


注释 NOTE in
 节距 Pitch 0.375
 滚子直径 RollerØ 0.2
 齿宽 h 0.168

单位:英寸 (Dimensions: in)

齿数 Teeth	外径 OD	节径 P.C.D	孔径 Bore:d	Type "B" Simplex (B型单排)			Type B Duplex(双排)			
				Hub (凸台)		Weight (重量)	Material (材质)	孔径 Bore: d	Weight (重量)	Material (材质)
				BD (直径)	BL (总高)					
8	1.13	0.980	3/8	3/4	3/4	0.07	1045	3/8	0.04	1020
9	1.26	1.096	3/8	27/32	3/4	0.09	1045	3/8	0.04	1020
10	1.38	1.214	3/8	31/32	3/4	0.14	1045	3/8	0.05	1020
11	1.50	1.331	3/8	11/16	3/4	0.17	1045	3/8	0.06	1020
12	1.63	1.449	1/2	17/32	3/4	0.20	1045	3/8	0.07	1020
13	1.75	1.567	1/2	11/4	3/4	0.23	1045	3/8	0.08	1020
14	1.87	1.685	1/2	11/4	3/4	0.25	1045	3/8	0.08	1020
15	1.99	1.804	1/2	111/32	3/4	0.29	1045	1/2	0.10	1020
16	2.11	1.922	1/2	115/32	3/4	0.35	1045	1/2	0.12	1020
17	2.23	2.041	1/2	119/32	3/4	0.42	1045	1/2	0.12	1020
18	2.35	2.159	1/2	123/32	3/4	0.48	1045	1/2	0.14	1020
19	2.47	2.278	1/2	127/32	3/4	0.54	1045	1/2	0.16	1020
20	2.59	2.397	1/2	115/16	3/4	0.59	1045	1/2	0.20	1020
21	2.71	2.516	1/2	2	7/8	0.80	1045	1/2	0.20	1020
22	2.83	2.635	1/2	2	7/8	0.80	1045	1/2	0.22	1020
23	2.95	2.754	1/2	2	7/8	0.82	1045	1/2	0.24	1020
24	3.07	2.873	1/2	2	7/8	0.88	1045	1/2	0.26	1020
25	3.19	2.992	1/2	2	7/8	0.88	1045	1/2	0.28	1020
26	3.31	3.111	1/2	2	7/8	0.90	1045	1/2	0.28	1020
27	3.43	3.230	1/2	2	7/8	0.94	1045	1/2	0.34	1020
28	3.55	3.349	1/2	2	7/8	0.94	1045	1/2	0.39	1020
29	3.67	3.469	1/2	2	7/8	0.98	1045	1/2	0.42	1020
30	3.79	3.588	1/2	2	7/8	1.02	1045	1/2	0.45	1020
31	3.91	3.707	1/2	2	7/8	1.06	1045	1/2	0.48	1020
32	4.03	3.826	1/2	2	7/8	1.10	1045	5/8	0.51	1020
33	4.15	3.945	5/8	21/4	7/8	1.29	1045	5/8	0.54	1020
34	4.27	4.064	5/8	21/4	7/8	1.32	1045	5/8	0.57	1020
35	4.39	4.183	5/8	21/4	7/8	1.36	1045	5/8	0.60	1020
36	4.51	4.303	5/8	21/4	7/8	1.40	1045	5/8	0.62	1020
37	4.63	4.422	5/8	21/4	1	1.48	1045	5/8	0.64	1020
38	4.75	4.541	5/8	21/4	1	1.52	1045	5/8	0.66	1020
39	4.87	4.660	5/8	21/4	1	1.57	1045	5/8	0.68	1020
40	4.99	4.780	5/8	21/4	1	1.62	1045	19/32	0.70	1020
42	5.23	5.018	5/8	21/4	1	1.68	1045	19/32	0.78	1020
45	5.59	5.376	5/8	21/4	1	1.78	1045	19/32	0.88	1020
48	5.95	5.734	5/8	21/4	1	1.88	1045	19/32	1.21	1020
50	6.19	5.972	5/8	21/4	1	1.98	1045	19/32	1.23	1020
54	6.66	6.449	3/4	21/4	1	2.20	1045	19/32	1.32	1020
60	7.38	7.165	3/4	21/4	1	2.48	1045	23/32	1.66	1020
65	7.98	7.762	3/4	21/4	1	2.78	1045	23/32	1.96	1020
70	8.58	8.358	3/4	21/4	1	3.12	1045	23/32	2.30	1020
72	8.81	8.597	3/4	21/4	1	3.42	1045	23/32	2.56	1020
80	9.77	9.552	3/4	21/4	1	3.82	1045	23/32	3.16	1020
84	10.25	10.029	3/4	21/4	1	4.24	1045	23/32	3.26	1020
96	11.68	11.461	3/4	21/4	1	5.16	1045	23/32	4.64	1020
112	13.59	13.371	3/4	21/4	1	6.70	1045	23/32	5.05	1020

链轮 /Sprocket 40 Sprocket

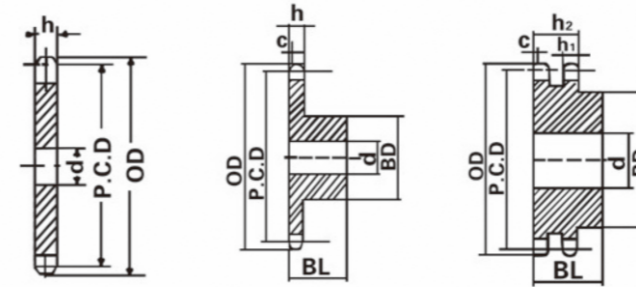


注释 NOTE in
 节距 Pitch 0.50
 滚子直径 RollerØ 0.31
 齿宽 h 0.284
 齿宽 h1 0.275
 齿宽 h2 0.841

单位:英寸 (Dimensions: in)

齿数 Teeth	外径 OD	节径 P.C.D	孔径 Bore:d	Type "B" Simplex (B型单排)			Material (材质)	Type B Duplex(双排)					
				Hub (凸台)		Weight (重量)		孔径 Bore: d	Hub (凸台)		Weight (重量)	Material (材质)	
				BD (直径)	BL (总高)				BD (直径)	BL (总高)			
8	1.50	1.307	1/2	31/32	7/8	0.18	1045						
9	1.67	1.462	1/2	11/16	7/8	0.20	1045						
10	1.84	1.618	1/2	11/14	7/8	0.27	1045						
11	2.00	1.775	1/2	13/8	7/8	0.35	1045	1/2	17/16	11/2	0.62		
12	2.17	1.932	1/2	19/16	7/8	0.45	1045	1/2	19/16	11/2	0.76		
13	2.33	2.089	1/2	19/16	7/8	0.50	1045	1/2	11/2	11/2	0.86		
14	2.49	2.247	1/2	111/16	7/8	0.59	1045	1/2	111/16	11/2	1.08		
15	2.65	2.405	1/2	113/16	7/8	0.70	1045	1/2	113/16	11/2	1.24		
16	2.81	2.563	5/8	2	7/8	0.79	1045	5/8	2	11/2	1.42		
17	2.98	2.721	5/8	21/8	1	1.04	1045	5/8	21/8	11/2	1.64		
18	3.14	2.879	5/8	25/16	1	1.22	1045	5/8	25/16	11/2	1.92		
19	3.30	3.038	5/8	21/2	1	1.43	1045	5/8	21/2	11/2	2.22		
20	3.46	3.196	5/8	25/8	1	1.56	1045	5/8	25/8	15/8	2.64		
21	3.62	3.355	5/8	23/4	1	1.73	1045	5/8	23/4	15/8	2.94		
22	3.78	3.513	5/8	27/8	1	1.96	1045	5/8	27/8	15/8	3.18		
23	3.94	3.672	5/8	3	1	2.13	1045	5/8	3	15/8	3.52		
24	4.10	3.831	5/8	31/4	1	2.41	1045	5/8	31/4	15/8	4.04		
25	4.26	3.989	5/8	31/4	1	2.54	1045	5/8	31/4	15/8	4.26		
26	4.42	4.148	5/8	31/4	1	2.58	1045	5/8	31/4	15/8	4.48		
27	4.58	4.307	5/8	31/4	1	2.66	1045						
28	4.74	4.466	5/8	31/4	1	2.73	1045						
29	4.90	4.624	5/8	31/4	1	2.80	1045						
30	5.06	4.783	5/8	31/4	1	2.98	1045	7/8	31/4	15/8	5.34		
31	5.22	4.942	5/8	31/4	1	3.10	1045						
32	5.38	5.101	5/8	31/4	1	3.16	1045						
33	5.54	5.260	5/8	31/4	1	3.22	1045						
34	5.70	5.412	5/8	31/4	1	3.30	1045						
35	5.86	5.578	5/8	31/4	1	3.46	1045	7/8	31/4	15/8	6.80		
36	6.02	5.737	5/8	31/4	1	3.58	1045	15/16	31/4	15/8	7.20		
37	6.18	5.896	5/8	31/4	1	3.62	1045						
38	6.33	6.054	5/8	31/4	1	3.70	1045						
39	6.49	6.214	5/8	31/4	1	3.76	1045						
40	6.65	6.373	3/4	31/2	11/8	4.69	1045	15/16	31/4	13/4	9.40		
41	6.81	6.532	3/4	31/2	11/8	4.76	1045						
42	6.97	6.691	3/4	31/2	11/8	4.82	1045	15/16	33/4	13/4	10.20		
43	7.13	6.850	3/4	31/2	11/8	5.12	1045						
44	7.29	7.009	3/4	31/2	11/8	5.15	1045						
45	7.45	7.168	3/4	31/2	11/8	5.30	1045	15/16	33/4	13/4	11.36		
46	7.61	7.327	3/4	31/2	11/8	5.44	1045						
47	7.77	7.486	3/4	31/2	11/8	5.59	1045						
48	7.93	7.645	3/4	31/2	11/8	5.74	1045	15/16	33/4	13/4	12.66		
49	8.09	7.804	3/4	31/2	11/8	5.90	1045						
50	8.25	7.963	3/4	31/2	11/8	5.96	1045						
51	8.41	8.122	3/4	31/2	11/8	6.08	1045						
52	8.57	8.281	3/4	31/2	11/8	6.28	1045	15/16	33/4	13/4	14.46		
53	8.73	8.440	3/4	31/2	11/8	6.33	1045						
54	8.89	8.599	3/4	31/2	11/8	6.42	1045	15/16	33/4	13/4	15.48		
55	9.04	8.758	3/4	31/2	11/8	6.56	1045						
56	9.20	8.917	3/4	31/2	11/8	6.89	1045						
57	9.36	9.076	3/4	31/2	11/8	7.02	1045						
58	9.52	9.236	3/4	31/2	11/8	7.36	1045						
59	9.68	9.395	3/4	31/2	11/8	7.45	1045						
60	9.84	9.554	3/4	31/2	11/8	7.86	1045	15/16	33/4	13/4	18.60		
62							1020	13/16	41/4	21/8	24.96		
65	10.63	10.349	3/4	4	11/4	9.40	1020						
70	11.43	11.145	3/4	4	11/4	11.00	1020						
72	11.75	11.463	3/4	4	11/4	11.50	1020	13/16	41/4	21/8	27.88		
76							1020	13/16	41/4	21/8	30.18		
80	13.03	12.736	3/4	4	11/4	13.40	1020						
84	13.66	13.372	3/4	4	11/4	14.04	1020	13/16	41/4	21/8	36.24		
95							1020	13/16	41/4	21/8	38.84		
96	15.57	15.281	1	4	11/4	17.56	1020	13/16	41/4				


链轮 /Sprocket 50 Sprocket

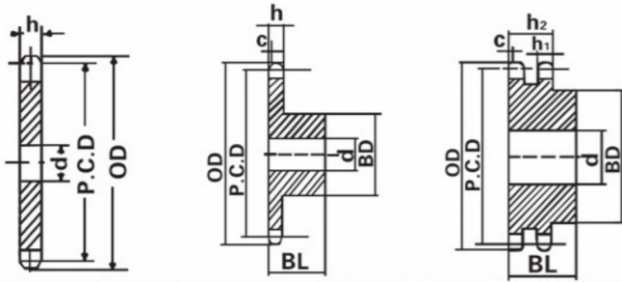

注释 NOTE in
 节距 Pitch 0.625
 滚子直径 RollerØ 0.400
 齿宽 h 0.343
 齿宽 h1 0.332
 齿宽 h2 1.045
 单位:英寸 (Dimensions: in)

齿数 Teeth	外径 OD	节径 P.C.D	孔径 Bore:d	Type "B" Simplex (B型单排)				Type B Duplex(双排)							
				Hub (凸台)		Weight (重量)	Material (材质)	孔径 Bore: d	Hub (凸台)		Weight (重量)	Material (材质)			
				BD (直径)	BL (总高)				BD (直径)	BL (总高)					
8	1.88	1.633	5/8	11/8	1	0.25									
9	2.09	1.827	5/8	43/8	1	0.36									
10	2.30	2.023	5/8	19/16	1	0.48									
11	2.50	2.219	5/8	13/4	1	0.64	5/8	115/32	13/4	0.96					
12	2.71	2.415	5/8	163/64	1	0.83	5/8	111/16	13/4	1.25					
13	2.91	2.612	5/8	17/8	1	0.88	5/8	17/8	13/4	1.56					
14	3.11	2.803	5/8	21/8	1	1.13	5/8	21/16	13/4	1.86					
15	3.32	3.006	5/8	23/8	1	1.34	3/4	25/16	13/4	2.22					
16	3.52	3.204	5/8	21/2	1	1.51	3/4	21/2	13/4	2.62					
17	3.72	3.401	5/8	211/16	1	1.74	3/4	211/16	13/4	3.04					
18	3.92	3.599	5/8	27/8	1	2.00	3/4	215/16	13/4	3.58					
19	4.12	3.797	5/8	3	1	2.22	1	31/8	13/4	3.90					
20	4.32	3.995	3/4	3	1	2.28	1	31/4	13/4	4.26					
21	4.52	4.194	3/4	3	1	2.40	1	31/2	13/4	4.90					
22	4.72	4.392	3/4	3	1	2.56	1	39/16	17/8	5.58					
23	4.92	4.590	3/4	3	1	2.66	1	35/8	17/8	6.10					
24	5.12	4.788	3/4	3	11/4	3.30	1	35/8	17/8	6.50					
25	5.32	4.987	3/4	3	11/4	3.40	1	35/8	17/8	6.94					
26	5.52	5.185	3/4	3	11/4	3.44	1	33/4	17/8	7.54					
27	5.72	5.384	3/4	3	11/4	3.74									
28	5.92	5.582	3/4	3	11/4	3.80									
29	6.12	5.781	3/4	3	11/4	4.06									
30	6.32	5.979	3/4	31/14	11/4	4.56	1	33/4	17/8	9.40					
31	6.52	6.178	3/4	31/14	11/4	4.74									
32	6.72	6.376	3/4	31/14	11/4	4.96	1	33/4	17/8	10.46					
33	6.92	6.575	3/4	31/14	11/4	5.14									
34	7.12	6.774	3/4	31/14	11/4	5.29									
35	7.32	6.972	3/4	31/14	11/4	5.44	1	33/4	17/8	12.28					
36	7.52	7.171	3/4	31/14	11/4	5.64	13/16	4	21/8	13.94					
37	7.72	7.370	3/4	31/14	11/4	5.90									
38	7.92	7.569	3/4	31/14	11/4	6.08									
39	8.12	7.767	3/4	31/14	11/4	6.30									
40	8.32	7.966	3/4	31/14	11/4	6.50	13/16	4	21/8	16.54					
41	8.52	8.165	3/4	31/14	11/4	6.64									
42	8.72	8.363	3/4	31/14	11/4	6.96	13/16	4	21/8	17.92					
43	8.91	8.562	3/4	31/14	11/4	7.06									
44	9.11	8.761	3/4	31/14	11/4	7.58									
45	9.31	8.960	3/4	33/4	11/4	8.08	13/16	4	21/8	20.30					
46	9.51	9.159	3/4	33/4	11/4	8.22									
47	9.71	9.357	3/4	33/4	11/4	8.48									
48	9.91	9.556	1	33/4	11/4	9.28	13/16	41/4	23/8	24.08					
49	10.11	9.755	1	33/4	11/4	9.52									
50	10.31	9.954	1	33/4	11/4	9.78									
51	10.51	10.153	1	33/4	11/4	10.00									
52	10.71	10.351	1	33/4	11/4	10.24	13/16	41/4	23/8	27.42					
53	10.91	10.550	1	33/4	11/4	10.48									
54	11.11	10.749	1	33/4	11/4	10.80	13/16	41/4	23/8	29.16					
55	11.31	10.948	1	33/4	11/4	11.00									
56	11.50	11.147	1	33/4	11/4	11.40									
57	11.70	11.346	1	33/4	11/4	11.70									
58	11.90	11.544	1	33/4	11/4	12.00									
59	12.10	11.743	1	33/4	11/4	12.32									
60	12.30	11.942	1	33/4	11/4	13.00	15/16	41/2	23/8	35.88					
65	13.30	12.936	1	33/4	13/4	15.50									
68				33/4			15/16	41/2	23/8	44.98					
70	14.29	13.931	1	33/4	13/4	18.16									
72	14.69	14.329	1	33/4	13/4	19.48	15/16	41/2	23/8	50.22					
76	15.49	15.124	1	33/4	13/4	21.00	15/16	41/2	23/8	45.64					
80	16.28	15.920	1	41/4	13/4	24.74									
84	17.08	16.715	1	41/4	13/4	25.50	15/16	41/2	23/8	51.64					
90	18.27	17.906	1	41/4	13/4	29.00									
95	19.27	18.903	1	41/4	13/4	32.00	15/16	41/2	23/8	64.32					
96	19.47	19.102	1	41/4	13/4	32.92	15/16	41/2	23/8	67.42					
102	20.66	20.295	1	41/4	13/4	36.30	15/16	41/2	23/8	72.68					
112	22.65	22.285	1	41/4	13/4	42.00	15/16	51/4	23/8	90.22					

链轮 /Sprocket 60 Sprocket

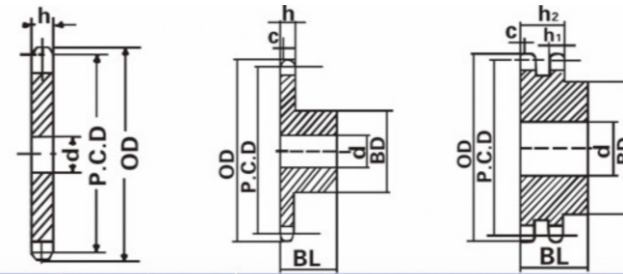


注释 NOTE in
 节距 Pitch 0.750
 滚子直径 RollerØ 0.469
 齿宽 h 0.459
 齿宽 h1 0.444
 齿宽 h2 1.341
 单位:英寸 (Dimensions: in)

齿数 Teeth	外径 OD	节径 P.C.D	孔径 Bore:d	Type "B" Simplex (B型单排)				Type B Duplex(双排)							
				Hub (凸台)		Weight (重量)	Material (材质)	孔径 Bore: d	Hub (凸台)		Weight (重量)	Material (材质)			
				BD (直径)	BL (总高)				BD (直径)	BL (总高)					
8	2.26	1.960	5/8	115/32	11/4	0.54									
9	2.51	2.193	3/4	19/16	11/4	0.64									
10	2.76	2.427	3/4	115/16	11/4	0.99									
11	3.00	2.663	3/4	21/16	11/4	1.16	1	113/16	21/8	1.62					
12	3.25	2.898	3/4	23/8	11/4	1.47	1	21/8	21/8	2.20					
13	3.49	3.134	3/4	211/32	11/4	1.66	1	21/4	21/8	2.60					
14	3.74	3.371	3/4	29/16	11/4	2.00	1	21/2	21/8	3.24					
15	3.98	3.608	3/4	27/8	11/4	2.51	1	213/16	21/8	3.96					
16	4.22	3.845	3/4	31/16	11/4	2.81	1	3	21/8	4.62					
17	4.46	4.082	3/4	31/4	11/4	3.22	1	31/4	21/8	5.40					
18	4.70	4.319	3/4	31/2	11/4	3.72	1	31/2	21/8	6.24					
19	4.95	4.557	3/4	31/2	11/4	3.92	1	311/16	21/8	7.00					
20	5.19	4.794	3/4	31/2	11/4	4.63	1	33/4	21/8	7.72					
21	5.43	5.033	3/4	37/8	11/4	5.00	1	41/8	21/8	8.82					
22	5.67	5.270	3/4	4	11/4	5.25	1	41/4	21/8	9.68					
23	5.91	5.508	3/4	4	11/4	5.48	1	41/4	21/8	10.30					
24	6.15	5.746	3/4	4	11/4	5.78	1	41/4	21/8	11.14					
25	6.39	5.984	3/4	4	11/4	6.13	1	41/4	21/8	11.96					
26	6.63	6.222	3/4	4	11/4	6.38	1	41/4	21/8	12.70					
27	6.87	6.461	3/4	4	11/4	6.72									
28	7.11	6.698	3/4	4	11/4	6.88									
29	7.35	6.937	3/4	4	11/4	7.28									
30	7.59	7.175	3/4	4	11/4	7.58									
31	7.83	7.413	3/4	4	11/4	7.72	1	41/4	21/8	16.36					
32	8.07	7.652	3/4	4	11/4	8.26	11/4	41/2	23/8	19.52					
33	8.30	7.890	1	4	11/4	8.42									
34	8.54	8.129	1	4	11/4	8.80									
35	8.78	8.367	1	4	11/4	9.04	11/4	41/2	23/8	22.80					
36	9.02	8.606	1	4	11/4	9.60	11/4	41/2	23/8	23.82					
37	9.26	8.844	1	4	11/4	10.24									
38	9.50	9.038	1	41/4	11/4	10.84									
39	9.74	9.321	1	41/4	11/4	11.36									
40	9.98	9.560	1	41/4	11/4	11.50	11/4	43/4	23/4	30.84					
41	10.22	9.798	1	41/4	11/4	12.14									
42	10.46	10.037	1	41/4	11/4	12.74	11/4	43/4	23/4	33.08					

▶ 产品介绍
Product Introduction

联轴器 /Coupling

联轴器 /Coupling ◀


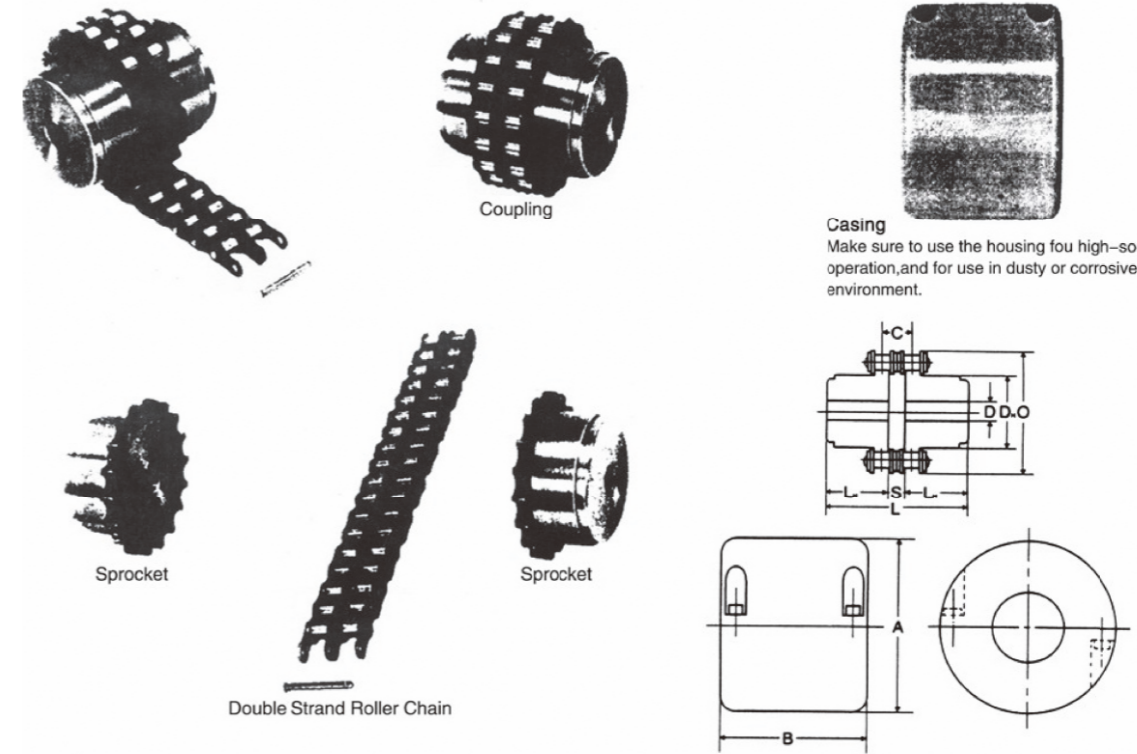


Casing
Make sure to use the housing for high-speed operation, and for use in dusty or corrosive environment.

单位(Dimensions): mm

联轴器 型号 Coupling No.	链条 节距 Chain Pitch	库存 孔径 Stock hole	轴径 Shaft Dia.		联轴器 Coupling						罩壳 Casing			
			最小 Min	最大 Max	外径 O	总长 L	凸台直径 D _H	L _H	S	C	概重Approx Weight (kg)	A	B	概重Approx Weight (kg)
3012	9.53	12	13.5	16	45	65.0	27.2	29.5	6.0	10.1	0.31	69	63	0.22
4012	12.70	12	14	22	62	79.4	36.0	36	7.4	14.4	0.73	77	72	0.30
4014		12	14	28	69	79.4	45.0	36			1.12	84	75	0.31
4016	15.88	13.5	16	32	77	87.4	51.5	40	9.7	18.1	1.50	92	72	0.35
5014		14.5	17	35	86	99.7	56.0	45			2.15	101	85	0.47
5016	19.05	14.5	18	40	96	99.7	64.0	45	11.5	22.8	2.75	110	87	0.50
5018		16	18	45	106	99.7	73.5	45			3.60	122	85	0.60
6018	25.40	20	22	56	127	123.5	89.5	56	15.2	29.3	6.55	147	105	1.20
6020		20	24	60	139	123.5	102.5	56			8.38	158	105	1.20
6022	31.75	20	28	71	151	123.5	115	56	18.8	35.8	10.40	168	117	1.20
8018		20	32	80	169	141.2	115	63			13.20	190	129	1.90
8020	38.10	20	36	90	185	145.2	125	65	22.7	45.4	16.20	210	137	2.50
8022		20	40	100	202	157.2	142	71			21.80	226	137	2.70
10020	38.10	25	45	110	233	178.8	162	80	22.7	45.4	32.40	281	153	4.10
12018		35	50	125	256	202.7	173	90			43.20	307	181	5.20
12022		35	56	140	304	222.7	213	100			69.10	357	181	6.70

► 齿条 /Rack

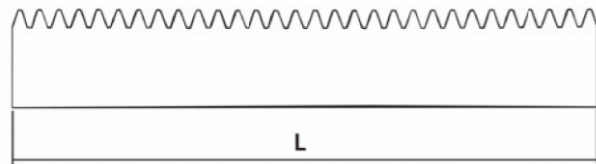



注释 NOTE
 压力角 Pressure angle 20°
 材质 Material C45

模数 MOD	长度 L1000mm	长度 L2000mm
	A X B	A X B
1	15 X 15	15 X 15
1.5	17 X 17	17 X 17
2	20 X 20	20 X 20
2.5	25 X 25	25 X 25
3	30 X 30	30 X 30
4	40 X 40	40 X 40
5	50 X 50	50 X 50
6	60 X 60	60 X 60
8	80 X 80	80 X 80


产品介绍 ◀

Product Introduction

齿轮 /Gear

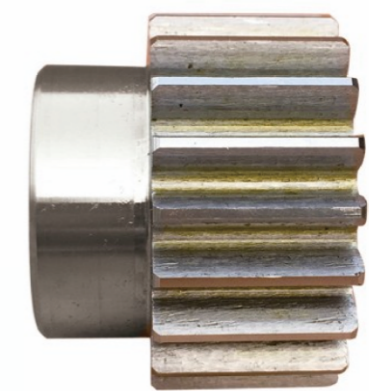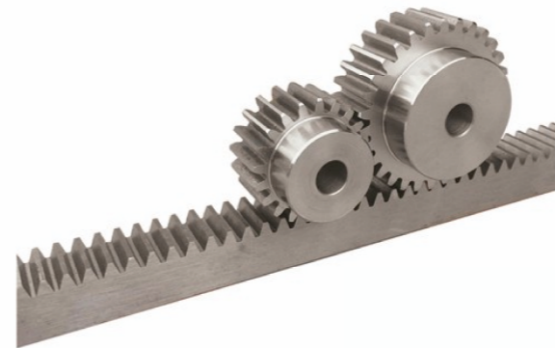

► A 型正齿轮 /Spur gears A type




注释 NOTE

齿宽 h (M=1) 15mm
 齿宽 h (M=1.5) 17mm
 压力角 Pressure angle 20°
 材质 Material C45

齿数 Teeth	模数 M=1	
	De	Dp
15	17	15
16	18	16
17	19	17
18	20	18
19	21	19
20	22	20
21	23	21
22	24	22
23	25	23
24	26	24
25	27	25
26	28	26
27	29	27
28	30	28
29	31	29
30	32	30
31	33	31
32	34	32
33	35	33
34	36	34
35	37	35
36	38	36
37	39	37
38	40	38
39	41	39
40	42	40
41	43	41
42	44	42
43	45	43
44	46	44
45	47	45
46	48	46
47	49	47
48	50	48
49	51	49
50	52	50
55	57	55
60	62	60
65	67	65
70	72	70
72	74	72
75	77	75
76	78	76
80	82	80
85	87	85
90	92	90
95	97	95
100	102	100
110	112	110
114	116	114
120	122	120
127	129	127

齿数 Teeth	模数 M=1.5	
	De	Dp
15	25.5	22.5
16	27.0	24.0
17	28.5	25.5
18	30.0	27.0
19	31.5	28.5
20	33.0	30.0
21	34.5	31.5
22	36.0	33.0
23	37.5	34.5
24	39.0	36.0
25	40.5	37.5
26	42.0	39.0
27	43.5	40.5
28	45.0	42.0
29	46.5	43.5
30	48.0	45.0
31	49.5	46.5
32	51.0	48.0
33	52.5	49.5
34	54.0	51.0
35	55.5	52.5
36	57.0	54.0
37	58.5	55.5
38	60.0	57.0
39	61.5	58.5
40	63.0	60.0
41	64.5	61.5
42	66.0	63.0
43	67.5	64.5
44	69.0	66.0
45	70.5	67.5
46	72.0	69.0
47	73.5	70.5
48	75.0	72.0
49	76.5	73.5
50	78.0	75.0
55	85.5	82.5
60	93.0	90.0
65	100.5	97.5
70	108.0	105.0
72	111.0	108.0
75	115.5	112.5
76	117.0	114.0
80	123.0	120.0
85	130.5	127.5
90	138.0	135.0
95	145.5	142.5
100	153.0	150.0
110	168.0	165.0
114	174.0	171.0
120	183.0	180.0
127	193.5	190.5

A 型正齿轮 /Spur gears A type ◀




注释 NOTE

齿宽 h (M=2) 20mm
 齿宽 h (M=2.5) 25mm
 压力角 Pressure angle 20°
 材质 Material C45

齿数 Teeth	模数 M=2	
	De	Dp
15	34	30
16	36	32
17	38	34
18	40	36
19	42	38
20	44	40
21	46	42
22	48	44
23	50	46
24	52	48
25	54	50
26	56	52
27	58	54
28	60	56
29	62	58
30	64	60
31	66	62
32	68	64
33	70	66
34	72	68
35	74	70
36	76	72
37	78	74
38	80	76
39	82	78
40	84	80
41	86	82
42	88	84
43	90	86
44	92	88
45	94	90
46	96	92
47	98	94
48	100	96
49	102	98
50	104	100
55	114	110
60	124	120
65	134	130
70	144	140
72	148	144
75	154	150
76	156	152
80	164	160
85	174	170
90	184	180
95	194	190
100	204	200
110	224	220
114	232	228
120	244	240
127	258	254

齿数 Teeth	模数 M=2.5	
	De	Dp
15	42.5	37.5
16	45.0	40.0
17	47.5	42.5
18	50.0	45.0
19	52.5	47.5
20	55.0	50.0
21	57.5	52.5
22	60.0	55.0
23	62.5	57.5
24	65.0	60.0
25	67.5	62.5
26	70.0	65.0
27	72.5	67.5
28	75.0	70.0
29	77.5	72.5
30	80.0	75.0
31	82.5	77.5
32	85.0	80.0
33	87.5	82.5
34	90.0	85.0
35	92.5	87.5
36	95.0	90.0
37	97.5	92.5
38	100.0	95.0
39	102.5	97.5
40	105.0	100.0
41	107.5	102.5
42	110.0	105.0
43	112.5	107.5
44	115.0	110.0
45	117.5	112.5
46	120.0	115.0
47	122.5	117.5
48	125.0	120.0
49	127.5	122.5
50	130.0	125.0
55	142.5	137.5
60	155.0	150.0
65	167.5	162.5
70	180.0	175.0
72	185.0	180.0
75	192.5	187.5
76	195.0	190.0
80	205.0	200.0
85	217.5	212.5
90	230.0	225.0
95	242.5	237.5
100	255.0	250.0
110	280.0	275.0
114	290.0	285.0
120	305.0	300.0
127	322.5	317.5

► A 型正齿轮 /Spur gears A type




注释 NOTE

齿宽 h (M=3) 30mm
 齿宽 h (M=4) 40mm
 压力角 Pressure angle 20°
 材质 Material C45

齿数 Teeth	模数 M=3	
	De	Dp
15	51	45
16	54	48
17	57	51
18	60	54
19	63	57
20	66	60
21	69	63
22	72	66
23	75	69
24	78	72
25	81	75
26	84	78
27	87	81
28	90	84
29	93	87
30	96	90
31	99	93
32	102	96
33	105	99
34	108	102
35	111	105
36	114	108
37	117	111
38	120	114
39	123	117
40	126	120
41	129	123
42	132	126
43	135	129
44	138	132
45	141	135
46	144	138
47	147	141
48	150	144
49	153	147
50	156	150
55	171	165
60	186	180
65	201	195
70	216	210
72	222	216
75	231	225
76	234	228
80	246	240
85	261	255
90	276	270
95	291	285
100	306	300
110	336	330
114	348	342
120	366	360
127	387	381

齿数 Teeth	模数 M=4	
	De	Dp
15	68	60
16	72	64
17	76	68
18	80	72
19	84	76
20	88	80
21	92	84
22	96	88
23	100	92
24	104	96
25	108	100
26	112	104
27	116	108
28	120	112
29	124	116
30	128	120
31	132	124
32	136	128
33	140	132
34	144	136
35	148	140
36	152	144
37	156	148
38	160	152
39	164	156
40	168	160
41	172	164
42	176	168
43	180	172
44	184	176
45	188	180
46	192	184
47	196	188
48	200	192
49	204	196
50	208	200
55	228	220
60	248	240
65	268	260
70	288	280
72	296	288
75	308	300
76	312	304
80	328	320
85	348	340
90	368	360
95	388	380
100	408	400
110	448	440
114	464	456

A 型正齿轮 /Spur gears A type ◀




注释 NOTE

齿宽 h (M=5) 50mm
 齿宽 h (M=6) 60mm
 压力角 Pressure angle 20°
 材质 Material C45

齿数 Teeth	模数 M=5	
	De	Dp
15	85	75
16	90	80
17	95	85
18	100	90
19	105	95
20	110	100
21	115	105
22	120	110
23	125	115
24	130	120
25	135	125
26	140	130
27	145	135
28	150	140
29	155	145
30	160	150
32	170	160
35	185	175
38	200	190
40	210	200
45	235	225
48	250	240
50	260	250
52	270	260
55	285	275
57	295	285
60	310	300
65	335	325
70	360	350
75	385	375
76	390	380
80	410	400
85	435	425
90	460	450
95	485	475
100	510	500
110	560	550
114	580	570

齿数 Teeth	模数 M=6	
	De	Dp
15	102	90
16	108	96
17	114	102
18	120	108
19	126	114
20	132	120
21	138	126
22	144	132
23	150	138
24	156	144
25	162	150
26	168	156
27	174	162
28	180	168
29	186	174
30	192	180
32	204	192
35	222	210
38	240	228
40	252	240

► B 型正齿轮 /Spur gears B type




注释 NOTE

齿宽 h (M=1) 15mm
 齿宽 h (M=1.5) 17mm
 总高 H (M=1) 25mm
 总高 H (M=1.5) 30mm
 压力角 Pressure angle 20°
 材质 Material C45

齿数 Teeth	模数 M=1			
	De	Dp	d	D
12	14	12	9	5
13	15	13	10	5
14	16	14	10	5
15	17	15	12	6
16	18	16	13	6
17	19	17	14	8
18	20	18	15	8
19	21	19	15	8
20	22	20	16	8
21	23	21	16	8
22	24	22	18	8
23	25	23	18	8
24	26	24	20	8
25	27	25	20	8
26	28	26	20	8
27	29	27	20	8
28	30	28	20	8
29	31	29	20	8
30	32	30	20	8
31	33	31	25	10
32	34	32	25	10
33	35	33	25	10
34	36	34	25	10
35	37	35	25	10
36	38	36	25	10
37	39	37	25	10
38	40	38	25	10
39	41	39	25	10
40	42	40	25	10
41	43	41	30	10
42	44	42	30	10
43	45	43	30	10
44	46	44	30	10
45	47	45	30	10
46	48	46	30	10
47	49	47	30	10
48	50	48	30	10
49	51	49	30	10
50	52	50	30	10
51	53	51	40	12
52	54	52	40	12
53	55	53	40	12
54	56	54	40	12
55	57	55	40	12
56	58	56	40	12
57	59	57	40	12
58	60	58	40	12
59	61	59	40	12
60	62	60	40	12
61	63	61	50	12
62	64	62	50	12
63	65	63	50	12
64	66	64	50	12
65	67	65	50	12
66	68	66	50	12
67	69	67	50	12
68	70	68	50	12
69	71	69	50	12
70	72	70	50	12
72	74	72	50	12
75	77	75	50	12
76	78	76	50	12
80	82	80	50	12

齿数 Teeth	模数 M=1.5			
	De	Dp	d	D
12	21.0	18.0	14	8
13	22.5	19.5	14	8
14	24.0	21.0	17	8
15	25.5	22.5	18	8
16	27.0	24.0	20	8
17	28.5	25.5	20	8
18	30.0	27.0	20	8
19	31.5	28.5	20	8
20	33.0	30.0	25	8
21	34.5	31.5	25	10
22	36.0	33.0	25	10
23	37.5	34.5	25	10
24	39.0	36.0	25	10
25	40.5	37.5	25	10
26	42.0	39.0	30	12
27	43.5	40.5	30	12
28	45.0	42.0	30	12
29	46.5	43.5	30	12
30	48.0	45.0	30	12
31	49.5	46.5	35	12
32	51.0	48.0	35	12
33	52.5	49.5	35	12
34	54.0	51.0	35	12
35	55.5	52.5	35	12
36	57.0	54.0	35	12
37	58.5	55.5	40	12
38	60.0	57.0	40	12
39	61.5	58.5	40	12
40	63.0	60.0	40	14
41	64.5	61.5	50	14
42	66.0	63.0	50	14
43	67.5	64.5	50	14
44	69.0	66.0	50	14
45	70.5	67.5	50	14
46	72.0	69.0	50	14
47	73.5	70.5	50	14
48	75.0	72.0	50	14
49	76.5	73.5	50	14
50	78.0	75.0	50	14
51	79.5	76.5	60	15
52	81.0	78.0	60	15
53	82.5	79.5	60	15
54	84.0	81.0	60	15
55	85.5	82.5	60	15
56	87.0	84.0	60	15
57	88.5	85.5	60	15
58	90.0	87.0	60	15
59	91.5	88.5	60	15
60	93.0	90.0	60	15
61	94.5	91.5	70	20
62	96.0	93.0	70	20
63	97.5	94.5	70	20
64	99.0	96.0	70	20
65	100.5	97.5	70	20
66	102.0	99.0	70	20
67	103.5	100.5	70	20
68	105.0	102.0	70	20
69	106.5	103.5	70	20
70	108.0	105.0	70	20
72	111.0	108.0	80	20

B 型正齿轮 /Spur gears B type ◀




注释 NOTE

齿宽 h (M=2) 20mm
 齿宽 h (M=2.5) 25mm
 总高 H (M=2) 35mm
 总高 H (M=2.5) 40mm
 压力角 Pressure angle 20°
 材质 Material C45

齿数 Teeth	模数 M=2			
	De	Dp	d	D
12	28	24	18	10
13	30	26	19	10
14	32	28	20	10
15	34	30	22	10
16	36	32	24	10
17	38	34	25	10
18	40	36	25	10
19	42	38	25	10
20	44	40	30	10
21	46	42	30	12
22	48	44	30	12
23	50	46	30	12
24	52	48	35	12
25	54	50	35	12
26	56	52	40	12
27	58	54	40	12
28	60	56	40	12
29	62	58	40	14
30	64	60	40	14
31	66	62	45	14
32	68	64	45	14
33	70	66	45	14
34	72	68	45	14
35	74	70	45	14
36	76	72	45	14
37	78	74	50	14
38	80	76	50	14
39	82	78	50	14
40	84	80	50	14
41	86	82	60	16
42	88	84	60	16
43	90	86	60	16
44	92	88	60	16
45	94	90	60	16
46	96	92	60	16
47	98	94	60	16
48	100	96	70	16
49	102	98	70	16
50	104	100	70	16
51	106	102	70	20
52	108	104	70	20
53	110	106	70	20
54	112	108	70	20
55	114	110	70	20
56	116	112	70	20
57	118	114	70	20
58	120	116	70	20
59	122	118	70	20
60	124	120	70	20
61	126	122	80	20
62	128	124	80	20
63	130	126	80	20
64	132	128	80	20
65	134	130	80	20
66	136	132	80	20
67	138	134	80	20
68	140	136	80	20
69	142	138	80	20
70	144	140	80	20
72	148	144	80	20

齿数 Teeth	模数 M=2.5			
	De	Dp	d	D
12	35.0	30.0	22	10
13	37.5	32.5	25	10
14	40.0	35.0	28	10
15	42.5	37.5	30	10
16	45.0	40.0	32	12
17	47.5	42.5	35	12
18	50.0	45.0	35	12
19	52.5	47.5	35	12
20	55.0	50.0	40	14
21	57.5	52.5	40	14
22	60.0	55.0	45	14
23	62.5	57.5	45	14
24	65.0	60.0	45	14
25	67.5	62.5	50	14
26	70.0	65.0	50	14
27	72.5	67.5	50	14
28	75.0	70.0	50	14
29	77.5	72.5	50	14
30	80.0	75.0	55	16
31	82.5	77.5	55	16
32	85.0	80.0	55	16
33	87.5	82.5	55	16
34	90.0	85.0	55	16
35	92.5	87.5	60	16
36	95.0	90.0	60	16
37	97.5	92.5	60	16
38	100.0	95.0	60	16
39	102.5	97.5	60	16
40	105.0	100.0	70	20
41	107.5	102.5	70	20
42	110.0	105.0	70	20
43	112.5	107.5	70	20
44	115.0	110.0	70	20
45	117.5	112.5	70	20
46	120.0	115.0	70	20
47	122.5	117.5	80	20
48	125.0	120.0	80	20
49	127.5	122.5	80	20
50	130.0	125.0	80	20
51	132.5	127.5	90	20
52	135.0	130.0	90	20
53	137.5	132.5	90	20
54	140.0	135.0	90	20
55	142.5	137.5	90	20
56	145.0	140.0	100	20
57	147.5	142.5	100	20
58	150.0	145.0	100	20
59	152.5	147.5	100	20
60	155.0	150.0	100	20
62	160.0	155.0	100	20
63	162.5	157.5	100	20
65	167.5	162.5	100	20
67	172.5	167.5	100	20
70	180.0	175.0	100	20

► B 型正齿轮 /Spur gears B type




注释 NOTE

齿宽 h (M=3) 30mm
 齿宽 h (M=4) 40mm
 总高 H (M=3) 50mm
 总高 H (M=4) 60mm
 压力角 Pressure angle 20°
 材质 Material C45

齿数 Teeth	模数 M=3			
	De	Dp	d	D
12	42	36	25	12
13	45	39	25	12
14	48	42	30	12
15	51	45	35	12
16	54	48	38	15
17	57	51	42	15
18	60	54	45	15
19	63	57	45	15
20	66	60	45	15
21	69	63	45	15
22	72	66	50	15
23	75	69	50	15
24	78	72	50	16
25	81	75	60	16
26	84	78	60	16
27	87	81	60	16
28	90	84	60	16
29	93	87	60	16
30	96	90	60	16
31	99	93	70	20
32	102	96	70	20
33	105	99	70	20
34	108	102	70	20
35	111	105	70	20
36	114	108	70	20
37	117	111	80	20
38	120	114	80	20
39	123	117	80	20
40	126	120	80	20
41	129	123	90	20
42	132	126	90	20
43	135	129	90	20
44	138	132	90	20
45	141	135	90	20
46	144	138	90	20
47	147	141	90	20
48	150	144	100	20
49	153	147	100	20
50	156	150	100	20
54	168	162	100	20
55	171	165	100	20
56	174	168	100	20
57	177	171	100	20
60	186	180	100	20
62	192	186	100	20
65	201	195	100	20

齿数 Teeth	模数 M=4			
	De	Dp	d	D
12	56	48	35	14
13	60	52	40	14
14	64	56	45	14
15	68	60	45	14
16	72	64	50	15
17	76	68	50	15
18	80	72	50	15
19	84	76	60	15
20	88	80	60	15
21	92	84	70	20
22	96	88	70	20
23	100	92	75	20
24	104	96	75	20
25	108	100	75	20
26	112	104	75	20
27	116	108	75	20
28	120	112	75	20
29	124	116	75	20
30	128	120	75	20
31	132	124	80	20
32	136	128	80	20
33	140	132	80	20
34	144	136	80	20
35	148	140	80	20
36	152	144	80	20
37	156	148	80	20
38	160	152	80	25
39	164	156	80	25
40	168	160	80	25
45	188	180	80	25
48	200	192	80	25
50	208	200	80	25
60	248	240	100	25
65	268	260	100	25

B 型正齿轮 /Spur gears B type ◀



注释 NOTE

齿宽 h (M=5) 50mm
 齿宽 h (M=6) 60mm
 总高 H (M=5) 75mm
 总高 H (M=6) 80mm
 压力角 Pressure angle 20°
 材质 Material C45

齿数 Teeth	模数 M=5			
	De	Dp	d	D
12	70	60	45	16
13	75	65	50	16
14	80	70	55	20
15	85	75	60	20
16	90	80	65	20
17	95	85	70	20
18	100	90	70	20
19	105	95	70	20
20	110	100	80	20
21	115	105	80	20
22	120	110	80	25
23	125	115	90	25
24	130	120	90	25
25	135	125	90	25
26	140	130	100	25
27	145	135	100	25
28	150	140	100	25
29	155	145	100	25
30	160	150	100	25
32	170	160	110	25
36	190	180	110	25
38	200	190	110	30
40	210	200	110	30
42	220	210	120	30
55	285	275	120	30
60	310	300	120	30

齿数 Teeth	模数 M=6			
	De	Dp	d	D
12	84	72	54	20
14	96	84	65	20
15	102	90	70	20
16	108	96	75	20
18	120	108	80	20
20	132	120	90	20
23	150	138	110	25
24	156	144	110	25
25	162	150	110	25
30	192	180	110	25
40	252	240	120	25

► Transmission Chain

Transmission Chain Structure ◀

1. Standard : DIN (B series) /ANSI (A series)

2. Model:

1) Short Precision Roller Chain

A series: ANSI 35,40,50,60,80,100,120,140,160,180,200


B series: 05B,06B,08B,10B,12B,16B,20B,24B,32B,40B

3. Material: Carbon Steel or Stainless Steel


4. Package: 5FT/10FT/5M Per polybag and wooden pallet(Normally)

Polybag +neutral carton box


Polybag+color carton box with logo (OEM)

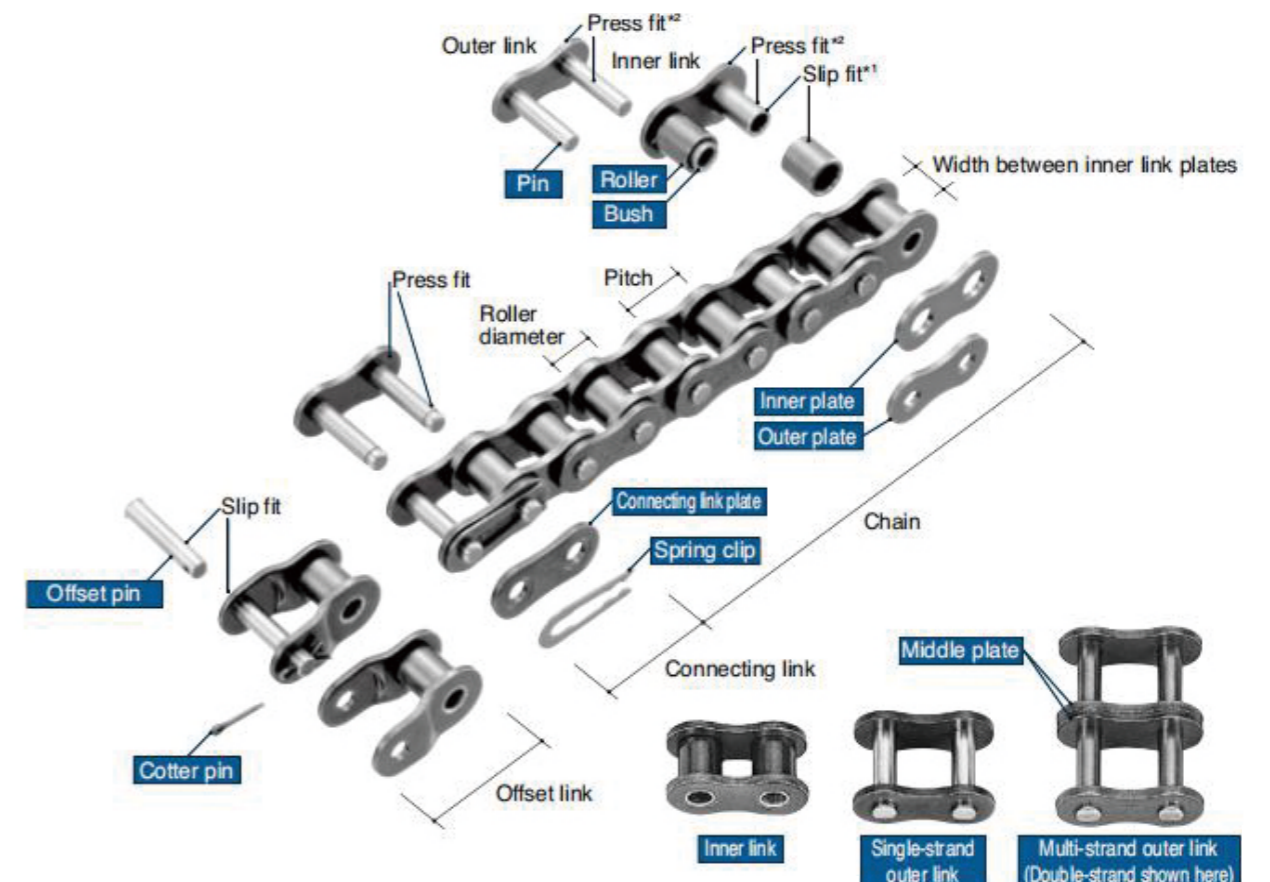

► A系列短节距精密滚子链条
Short pitch precision roller chain(A series)- 单排

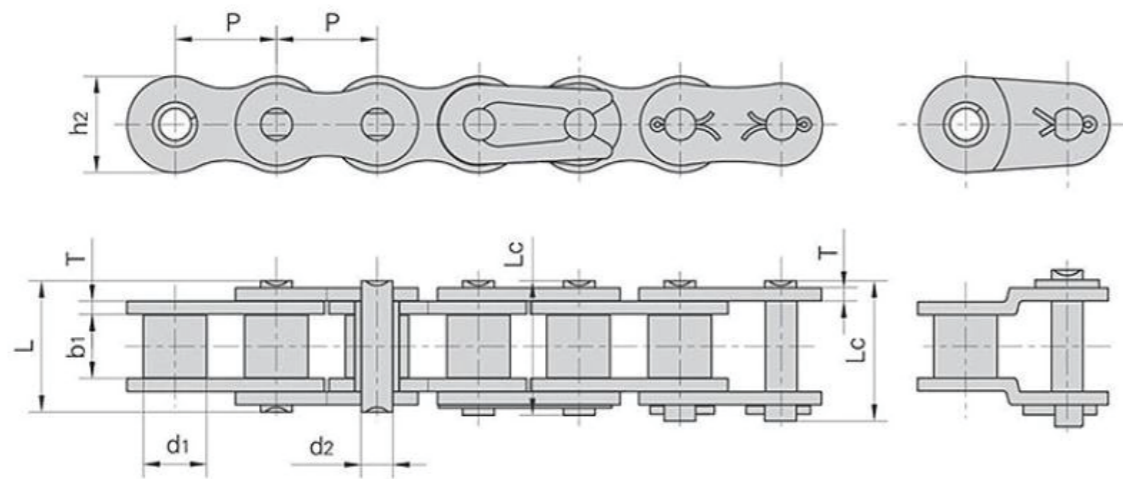


A系列短节距精密滚子链条 ◀
Short pitch precision roller chain(A series)- 双排

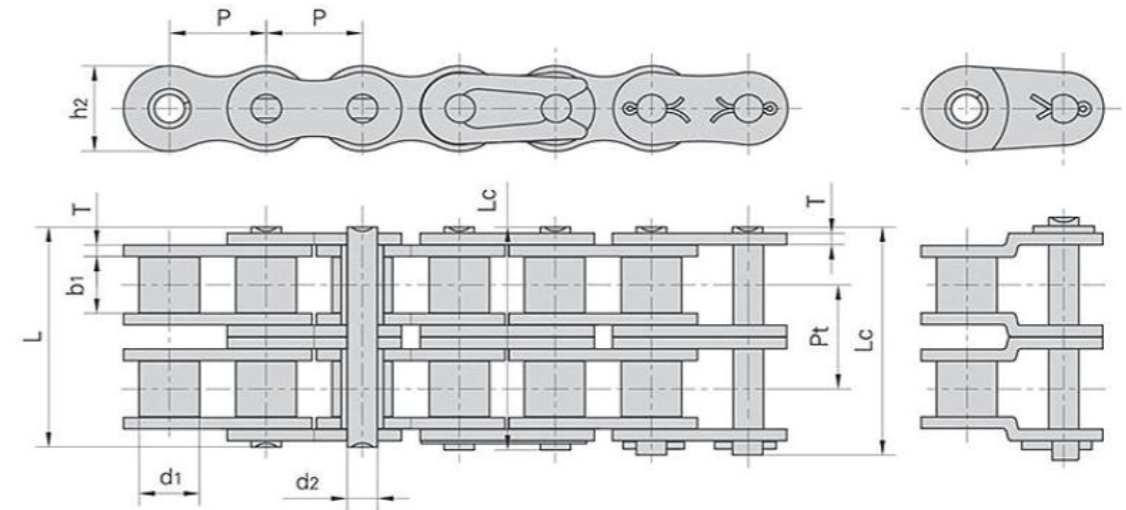

链号 DIN/ISO Chain NO.	盾牌 链号 Dunpai Chain No.	节距 Pitch P	滚子直径 Roller Diameter d1	内节内宽 Width between inner plates b1	销轴直径 Pin Diameter d2	销轴长度 Pin Length		内链板高 度 Inner plate depth h2	链板厚度 Plate thickness T	抗拉强度 tensile strength Q min	平均抗拉 强度 Average tensile strength QO	每米长重 Weight per meter q
						L	lc					
						max	max					
15	*03C	4.7625	2.48	2.38	1.62	6.10	6.90	4.30	0.60	1.80/409	2.0	0.08
*25	*04C-1	6.3500	3.30	3.18	2.31	7.90	8.40	6.00	0.80	3.50/795	5.0	0.15
*35	*06C-1	9.5250	5.08	4.77	3.58	12.40	13.17	9.00	1.30	7.90/1795	11.3	0.33
41	085-1	12.7000	7.77	6.25	3.58	13.75	15.00	9.91	1.30	6.67/1516	12.6	0.41
40	08A-1	12.7000	7.95	7.85	3.96	16.60	17.80	12.00	1.50	14.103205	18.6	0.62
50	10A-1	15.8750	10.16	9.40	5.08	20.70	22.20	15.09	2.03	22.20/5045	31.3	1.02
60	12A-1	19.0500	11.91	12.57	5.94	25.90	27.70	18.00	2.42	31.807227	43.2	1.50
80	16A-1	25.4000	15.88	15.75	7.92	32.70	35.00	24.00	3.25	56.70/12886	74.3	2.60
100	20A-1	31.7500	19.05	18.90	9.53	40.40	44.70	30.00	4.00	88.50/20114	107.6	3.91
120	24A-1	38.1000	22.23	25.22	11.10	50.30	54.30	35.70	4.80	127.00/2B864	163.1	5.62
140	28A-1	44.4500	25.40	25.22	12.70	54.40	59.00	41.00	5.60	1724039182	222.5	7.50
160	32A-1	50.8000	28.58	31.55	14.27	64.80	69.60	47.80	6.40	226.80/51545	266.9	10.10
180	36A-1	57.1500	35.71	35.48	17.46	72.80	78.60	53.60	7.20	280.2063682	361.1	13.45
200	40A-1	63.5000	39.68	37.85	19.85	80.30	87.20	60.00	8.00	353.80/80409	466.8	16.15
240	48A-1	76.2000	47.63	47.35	23.81	95.50	103.00	72.39	9.50	510.30/115977	671.6	23.20


链号 DIN/ISO Chain NO.	盾牌 链号 Dunpai Chain No.	节距 Pitch P	滚子直径 Roller Diameter d1	内节内宽 Width between inner plates b1	销轴直径 Pin Diameter d2	销轴长度 Pin Length		内链板高 度 Inner plate depth h2	链板厚度 Plate thickness T	排距 Trans verse pitch Pt	抗拉强度 tensile strength Q min	平均抗拉 强度 Average tensile strength QO	每米长重 Weight per meter q
						L	lc						
						max	max						
*25-2	*04C-2	6.350	3.30	3.18	2.31	14.5	15.0	6.00	0.80	6.40	7.00/1591	10.0	0.28
*35-2	*06C-2	9.525	5.08	4.77	3.58	22.5	23.3	9.00	1.30	10.13	15.803591	22.3	0.63
41-2	085-2	12.700	7.77	6.25	3.58	25.7	26.9	9.91	1.30	11.95	13.343032	16.9	0.81
40-2	08A-2	12.700	7.95	7.85	3.96	31.0	32.2	12.00	1.50	14.38	28.20/6409	37.2	1.12
50-2	10A-2	15.875	10.16	9.40	5.08	38.9	40.4	15.09	2.03	18.11	4440/10091	62.6	2.00
60-2	12A-2	19.050	11.91	12.57	5.94	48.8	50.5	18.00	2.42	22.78	63.60/14455	86.4	2.92
80-2	16A-2	25.400	15.88	15.75	7.92	62.7	64.3	24.00	3.25	29.29	113.40/25773	148.6	5.15
100-2	20A-2	31.750	19.05	18.90	9.53	76.4	80.5	30.00	4.00	35.76	177.00/40227	215.2	7.80
120-2	24A-2	38.100	22.23	25.22	11.10	95.8	99.7	35.70	4.80	45.44	254.0057727	326.2	11.70
140-2	28A-2	44.450	25.40	25.22	12.70	103.3	107.9	41.00	5.60	48.87	344.80/78364	445.0	15.14
160-2	32A-2	50.800	28.58	31.55	14.27	123.3	128.1	47.80	6.40	58.55	453.60/103091	533.8	20.14
180-2	36A-2	57.150	35.71	35.48	17.46	138.6	144.4	53.60	7.20	65.84	560.50/127386	722.2	29.22
200-2	40A-2	63.500	39.68	37.85	19.85	151.9	158.8	60.00	8.00	71.55	707.60/160818	933.6	32.24
240-2	48A-2	76.200	47.63	47.35	23.81	183.4	190.8	72.39	9.50	87.83	1020.60/213955	1343.2	45.23

▶ A 系列短节距精密滚子链条
Short pitch precision roller chain(A series)- 三排

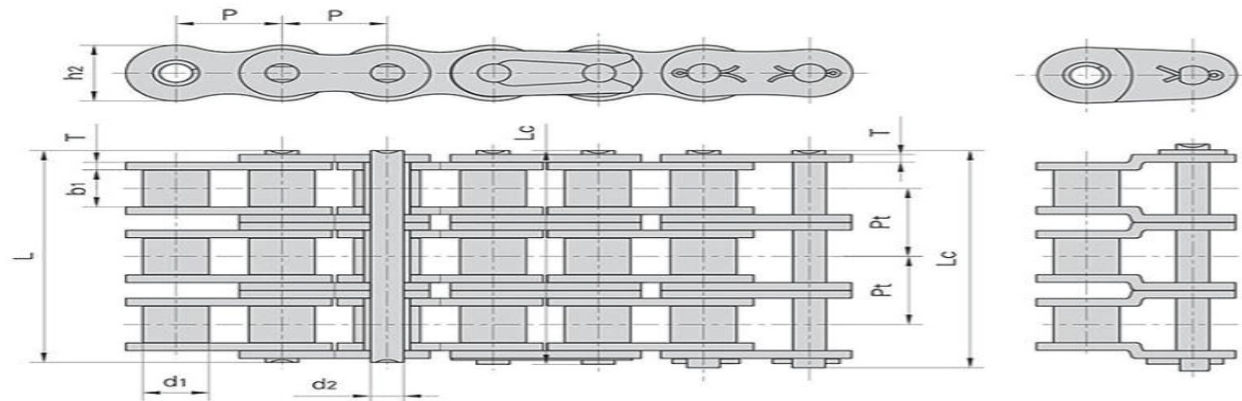


链号 DIN/ISO Chain NO.	盾牌 链号 Dunpai Chain No.	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between inner plates	销轴直径 Pin Diameter	销轴长度 Pin Length		内链板高 度 Inner plate depth	链板厚度 Plate thickness	排距 Trans verse pitch	抗拉强度 tensile strength	平均抗拉 强度 Average tensile strength	每米长重 Weight per meter
						L max	lc max						
						P mm	d1 max mm						
*25-3	*04C-3	6.350	3.30	3.18	2.31	21.0	21.5	6.00	0.80	6.40	10.5/23B6	15.0	0.44
*35-3	*06C-3	9.525	5.08	4.77	3.58	32.7	33.5	9.00	1.30	10.13	23.75386	33.9	1.05
40-3	08A-3	12.700	7.95	7.85	3.96	45.4	46.6	12.00	1.50	14.38	42.39614	55.8	1.90
50-3	10A-3	15.875	10.16	9.40	5.08	57.0	58.5	15.09	2.03	18.11	66.6/15136	93.9	3.09
60-3	12A-3	19.050	11.91	12.57	5.94	71.5	73.3	18.00	2.42	22.78	95.421682	129.6	4.54
80-3	16A-3	25.400	15.88	15.75	7.92	91.7	93.6	24.00	3.25	29.29	170.138659	222.9	7.89
100-3	20A-3	31.750	19.05	18.90	9.53	112.2	116.3	30.00	4.00	35.76	265.5/60341	322.8	11.77
120-3	24A-3	38.100	22.23	25.22	11.10	141.4	145.2	35.70	4.80	45.44	381.086591	489.3	17.53
140-3	28A-3	44.450	25.40	25.22	12.70	152.2	156.8	41.00	5.60	48.87	517.2/117545	667.5	22.20
160-3	32A-3	50.800	28.58	31.55	14.27	181.8	186.6	47.80	6.40	58.55	680.4/154636	800.7	30.02
180-3	36A-3	57.150	35.71	35.48	17.46	204.4	210.2	53.60	7.20	65.84	840.7/191068	1083.3	38.22
200-3	40A-3	63.500	39.68	37.85	19.85	223.5	230.4	60.00	8.00	71.55	1061.4/241227	1400.4	49.03
240-3	48A-3	76.200	47.63	47.35	23.81	271.3	278.6	72.39	9.50	87.83	1530.9/347932	2014.8	71.60

◀ B 系列短节距精密滚子链条
Short pitch precision roller chain(B series)- 单排

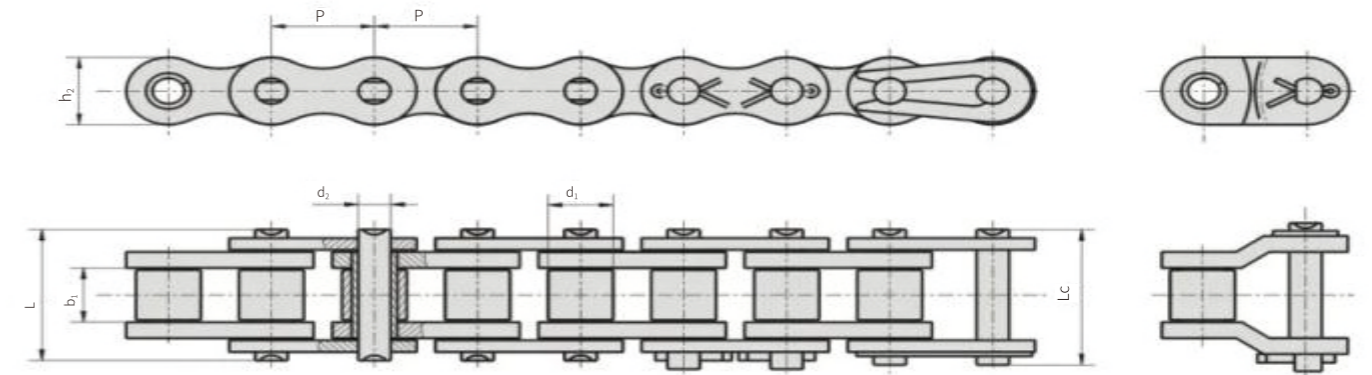


链号 DIN/ISO Chain NO.	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between inner plates	销轴直径 Pin Diameter	销轴长度 Pin Length		内链板高 度 Inner plate depth	链板厚度 Plate thickness	极限拉伸 负荷 Ultimate tensile strength	平均拉伸 负荷 Average tensile strength	每米长重 Weight per meter
					L max	lc max					
					P mm	d1 max mm					
04B-1	6.0	4.00	2.80	1.85	7.6	8.2	5.00	0.80	3.0	3.2	0.11
05B-1	8.0	5.00	3.00	2.31	7.9	8.4	7.11	0.80	5.0	5.8	0.20
06B-1	9.525	6.35	5.72	3.28	13.15	14.10	8.20	1.30	9.0	10.4	0.41
08B-1	12.70	8.51	7.75	4.45	16.70	18.20	11.80	1.60	18.0	19.4	0.69
10B-1	15.875	10.16	9.65	5.08	19.50	20.90	14.70	1.70	22.4	27.5	0.93
12B-1	19.05	12.07	11.68	5.72	22.50	24.2	16.10	1.85	29.0	32.2	1.15
16B-1	25.40	15.88	17.02	8.28	36.10	37.4	21.05	4.15/3.1	60.0	72.8	2.71
20B-1	31.75	19.05	19.56	10.19	41.30	45.0	26.30	4.5/3.5	95.0	106.7	3.70
24B-1	38.10	25.40	25.40	14.63	53.40	57.8	33.30	6.0/4.8	160.0	178.0	7.10
28B-1	44.45	27.94	30.99	15.90	65.10	69.5	36.90	7.5/6.0	200.0	222.0	8.50
32B-1	50.80	29.21	30.99	17.81	66.00	71.0	42.10	7.0/6.0	250.0	277.5	10.25
40B-1	63.50	39.37	38.10	22.89	82.20	89.2	52.96	8.5/8.0	355.0	394.0	16.35
48B-1	76.20	48.26	45.72	29.24	99.10	107.0	63.80	12.0/10.0	560.0	621.6	25.00
56B-1	88.90	53.98	53.34	34.32	114.60	123.0	77.80	13.5/12.0	850.0	940.0	35.78
64B-1	101.60	63.50	60.96	39.40	130.0	138.5	90.17	15.0/13.0	1120.0	1240	46.00
72B-1	114.30	72.39	68.58	44.48	147.4	156.4	103.60	17.0/15.0	1400.0	1550	60.80

► B 系列短节距精密滚子链条
Short pitch precision roller chain(B series)- 双排

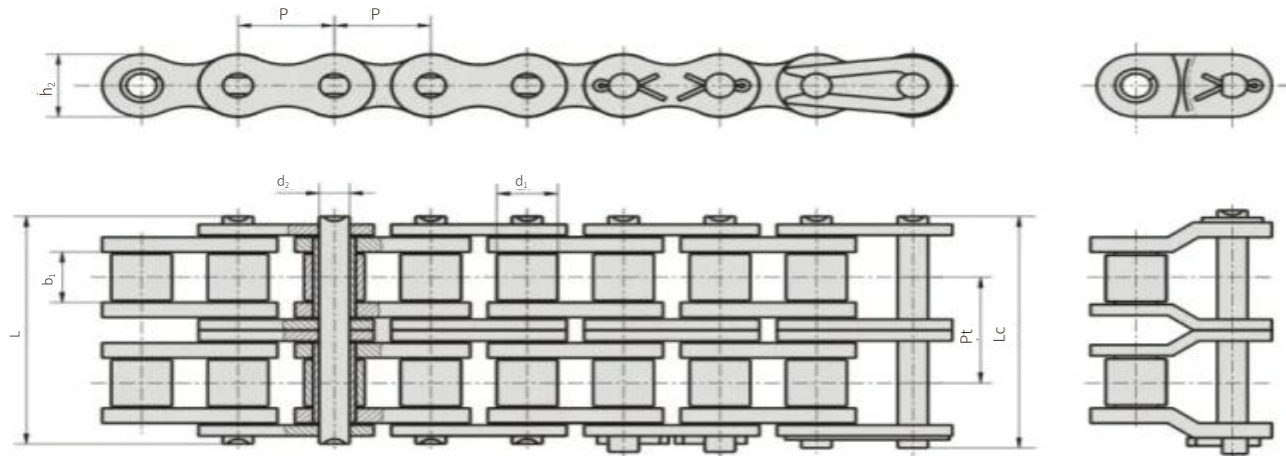

链号 DIN/ISO Chain NO.	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between inner plates	销轴直径 Pin Diameter	销轴长度 Pin Length		内链板高 度 Inner plate depth	链板厚度 Plate thickness	排距 Tran sverse pitch	极限拉伸 负荷 Ultimate tensile strength	平均拉伸 负荷 AVerage tensile strength	每米长重 Weight per meter
					L max	lc max						
					mm	mm						
058-2	8.00	5.00	3.00	2.31	13.75	14.25	7.10	0.80	5.64	7.8	10.2	0.33
068-2	9.525	6.35	5.72	3.28	23.4	24.4	8.20	1.30	10.24	16.9	18.7	0.77
088-2	12.70	8.51	7.75	4.45	31.2	32.2	11.80	1.60	13.92	32.0	38.7	1.34
108-2	15.875	10.16	9.65	5.08	36.1	37.5	14.70	1.70	16.59	44.5	56.2	1.84
12B-2	19.05	12.07	11.68	5.72	42.0	43.6	16.10	1.85	19.46	57.8	66.1	2.31
168-2	25.40	15.88	17.02	8.28	68.0	69.3	21.05	4.15/3.1	31.88	106.0	133.0	5.42
208-2	31.75	19.05	19.56	10.19	77.8	81.5	26.30	4.5/3.5	36.45	170.0	211.2	7.20
248-2	38.10	25.40	25.40	14.63	101.7	106.2	33.30	6.0/4.8	48.36	280.0	319.2	13.40
288-2	44.45	27.94	30.99	15.90	124.6	128.9	36.90	7.5/6.0	59.56	360.0	406.8	16.60
32B-2	50.80	29.21	30.99	17.81	124.6	129.4	42.10	7.0/6.0	58.55	450.0	508.5	21.00
408-2	63.50	39.37	38.10	22.89	154.5	161.5	52.96	8.5/8.0	72.29	630.0	711.9	32.00
488-2	76.20	48.26	45.72	29.24	190.4	198.2	63.80	12.0/10.0	91.21	1000.0	1130.0	50.00
568-2	88.90	53.98	53.34	34.32	221.2	229.6	77.80	13.5/12.0	106.60	1600.0	1760.0	71.48
648-2	101.60	63.50	60.96	39.40	249.9	258.4	90.17	15.0/13.0	119.89	2000.0	2200.0	91.00
72B-2	114.30	72.39	68.58	44.48	283.7	292.7	103.60	17.0/15.0	136.27	2500.0	2750.0	120.40



B 系列短节距精密滚子链条 ◀
Short pitch precision roller chain(B series)- 三排

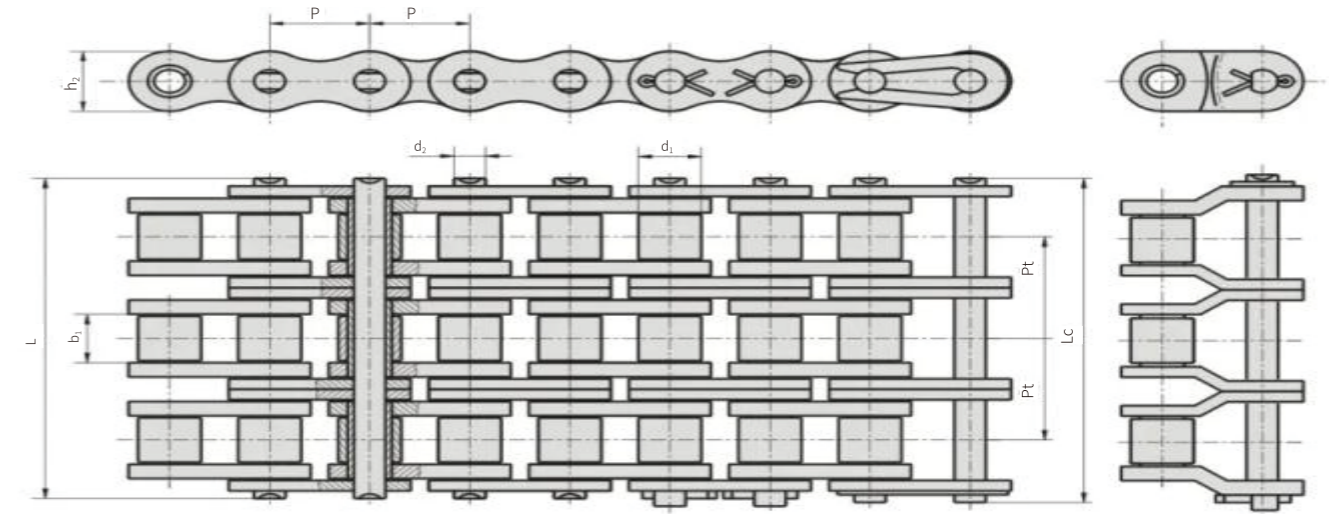

链号 DIN/ISO Chain NO.	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between inner plates	销轴直径 Pin Diameter	销轴长度 Pin Length		内链板高 度 Inner plate depth	链板厚度 Plate thickness	排距 Tran sverse pitch	极限拉伸 负荷 Ultimate tensile strength	平均拉伸 负荷 AVerage tensile strength	每米长重 Weight per meter
					L max	lc max						
					mm	mm						
05B-3	8.00	5.00	3.00	2.31	19.4	19.9	7.10	0.80	5.64	11.1	13.8	0.48
06B-3	9.525	6.35	5.72	3.28	33.5	34.6	8.20	1.30	10.24	24.9	30.1	1.16
08B-3	12.70	8.51	7.75	4.45	45.1	46.1	11.80	1.60	13.92	47.5	57.8	2.03
10B-3	15.875	10.16	9.65	5.08	52.7	54.1	14.70	1.70	16.59	66.7	84.5	2.77
12B-3	19.05	12.07	11.68	5.72	61.5	63.1	16.10	1.85	19.46	86.7	101.8	3.46
16B-3	25.40	15.88	17.02	8.28	99.8	101.2	21.05	4.15/3.1	31.88	160.0	203.7	8.13
20B-3	31.75	19.05	19.56	10.19	114.2	117.9	26.30	4.5/3.5	36.45	250.0	290.0	10.82
24B-3	38.10	25.40	25.40	14.63	150.1	154.6	33.30	6.0/4.8	48.36	425.0	493.0	20.10
28B-3	44.45	27.94	30.99	15.90	184.2	188.7	36.90	7.5/6.0	59.56	530.0	609.5	24.92
32B-3	50.80	29.21	30.99	17.81	183.1	188.2	42.10	7.0/6.0	58.55	670.0	770.5	31.56
40B-3	63.50	39.37	38.10	22.89	226.8	233.8	52.96	8.5/8.0	72.29	950.0	1092.5	48.10
48B-3	76.20	48.26	45.72	29.24	281.6	289.4	63.80	12.0/10.0	91.21	1500.0	1710.0	75.00
56B-3	88.90	53.98	53.34	34.32	327.8	336.2	77.80	13.5/12.0	106.60	2240.0	2240.0	107.18
64B-3	101.60	63.50	60.96	39.40	369.8	378.3	90.17	15.0/13.0	119.89	3000.0	3300.0	136.00
72B-3	114.30	72.39	68.58	44.48	420.0	429.0	103.60	17.0/15.0	136.27	3750.0	4125.0	180.00

► 重载系列滚子链条
Heavy duty series roller chain

A 系列直板滚子链条 ◀
Roller chain with straight side plates (A series)

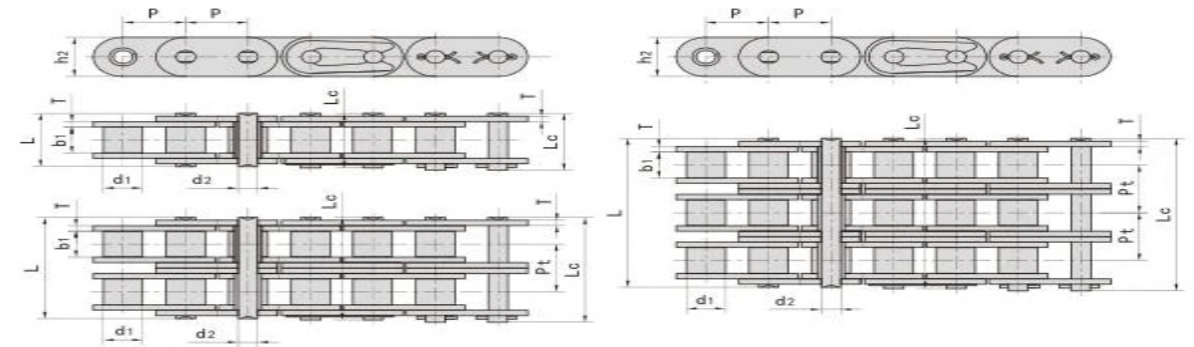
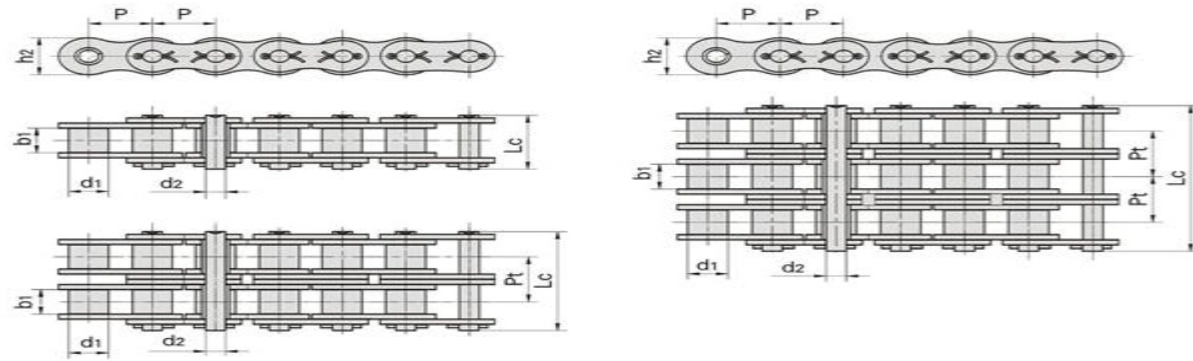


链号 Chain NO.	ANSI 链号 ANSI Chain No.	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between inner plates	销轴直径 Pin Diameter	销轴长度 Pin Length	内链板高度 Inner plate depth	排距 Transverse pitch	极限拉伸负荷 Ultimate tensile strength	平均拉伸负荷 Average tensile strength	每米长重 Weight per meter
		P	d1 max	b1 min	d2 max	lc max	h2 max	Pt	Q min	Q0	q
		mm	mm	mm	mm	mm	mm	mm	kN	kN	kg/m
10AH-1	50H-1	15.875	10.16	9.48	5.08	24.4	15	-	22.2	30.2	1.2
12AH-1	60H-1	19.05	11.91	12.57	5.94	31.7	18	-	318	42.7	1.94
16AH-1	80H-1	25.4	15.88	15.75	7.92	38.7	24	-	56.7	71.4	3.17
20AH-1	100H-1	31.75	19.05	18.9	9.53	46.8	30.1	-	88.5	112.4	4.95
24AH-1	120H-1	38.1	22.23	25.22	11.1	56.8	36.1	-	127	1609	6.7
28AH-1	140H-1	44.45	25.4	25.22	12.7	62	42.1	-	172.4	217.3	8.53
32AH-1	160H-1	50.8	28.58	31.55	14.27	71.5	48.1	-	226.8	285.8	11.1
36AH-1	180H-1	57.15	35.71	35.48	17.46	81.8	53.6	-	281.4	353.1	14.9
40AH-1	200H-1	63.5	39.68	37.85	19.84	93.2	60	-	353.8	444.5	19.1
12A 日-2	60H-2	19.05	11.91	12.57	5.94	57.8	18	26.11	63.6	84.5	381
16AH-2	8DH-2	25.4	15.88	15.75	7.92	71.3	24	32.59	113.4	145.3	6.24
20AH-2	100H-2	31.75	19.05	18.9	9.53	85.9	30.1	39.09	177	225.9	9.78
24AH-2	120H-2	38.1	22.23	25.22	11.1	105.7	36.1	48.87	254	322.7	13.27
28AH-2	140H-2	44.45	25.4	25.22	12.7	114.4	42.1	52.2	344.8	437.7	16.93
32AH-2	160H-2	50.8	28.58	31.55	14.27	133.5	48.1	61.9	453.6	571.6	22.11
36AH-2	180H-2	57.15	35.71	35.48	17.46	151	53.6	69.18	560.5	708.3	29.46
40AH-2	200H-2	63.5	39.68	37.85	19.84	171.6	60	78.31	707.6	894.9	37.69
12AH-3	60H-3	19.05	11.91	12.57	5.94	83.9	18	26.11	95.4	113.9	5.68
16AH-3	8DH-3	25.4	15.88	15.75	7.92	104.2	24	32.59	170.1	203.5	9.35
20AH-3	100H-3	31.75	19.05	18.9	9.53	125	30.1	39.09	265.5	314.8	14.54
24AH-3	120H-3	38.1	22.23	25.22	11.1	154.8	36.1	48.87	381	444.7	19.83
28AH-3	140H-3	44.45	25.4	25.22	12.7	166.8	42.1	52.2	517.2	598.4	25.3
32AH-3	160H-3	50.8	28.58	31.55	14.27	195.6	48.1	61.9	680.4	787.3	33.05
36AH-3	180H-3	57.15	35.71	35.48	17.46	220.5	53.6	69.16	840.7	983.6	43.99
40AH-3	200H-3	63.5	39.68	37.85	19.84	250.1	60	78.31	1061.4	1228.2	56.26

链号 Chain NO.	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between inner plates	销轴直径 Pin Diameter	销轴长度 Pin Length		内链板高度 Inner plate depth	链板厚度 Plate thickness	排距 Transverse pitch	抗拉强度 tensile strength	平均拉伸负荷 Average tensile strength	每米长重 Weight per meter	
					L max	lc max							
					mm	mm							
*C35-1	9.525	5.08	4.77	3.58	13.3	14.3	9.00	1.30	-	7.91795	10.8	0.41	
C08A-1	C40-1	12.700	7.95	7.85	3.96	16.6	18.8	12.00	1.50	-	14.1/3273	17.5	0.73
C10A-1	C50-1	15.875	10.16	9.40	5.08	20.7	23.3	15.09	2.03	-	22.2/5045	29.4	1.23
C12A-1	C60-1	19.050	11.91	12.57	5.94	25.9	28.3	18.00/18.20	2.42	-	31.8/7227	41.5	1.814.83
C16A-1	C80-1	25.400	15.88	15.75	7.92	32.7	36.5	24.00	3.25	-	56.7/12886	69.4	3.09
C20A-1	C100-1	31.750	19.05	18.90	9.53	40.4	44.7	30.00	4.00	-	88.520114	109.2	4.56
C24A-1	C120-1	38.100	22.23	25.22	11.10	50.3	54.3	35.70	4.80	-	127.0/28864	156.3	6.86
C28A-1	C140-1	44.450	25.40	25.22	12.70	54.4	59.0	41.00	5.60	-	172.4/39182	212.0	8.49
C32A-1	C160-1	50.800	28.58	31.55	14.27	64.8	69.6	47.80	6.40	-	226.851545	278.9	11.50
C08A-2	C40-2	12.700	7.95	7.85	3.96	31.0	33.2	12.00	1.50	14.38	28.26409	35.9	1.43
C10A-2	C50-2	15.875	10.16	9.40	5.08	38.9	41.4	15.09	2.03	18.11	44.410091	58.1	2.42
C12A-2	C60-2	19.050	11.91	12.57	5.94	48.8	51.1	18.00/48.20	2.42	22.78	63.614455	82.1	3.58/3.62
C16A-2	C80-2	25.400	15.88	15.75	7.92	62.7	65.8	24.00	3.25	29.29	113.4/25773	141.8	6.12
C20A-2	C100-2	31.750	19.05	18.90	9.53	76.4	80.5	30.00	4.00	35.76	177.040227	219.4	9.08
C24A-2	C120-2	38.100	22.23	25.22	11.10	95.8	99.7	35.70	4.80	45.44	254.057727	314.9	13.60
C28A-2	C140-2	44.450	25.40	25.22	12.70	103.3	107.9	41.00	5.60	48.87	344.8/78364	427.5	16.86
C32A-2	C160-2	50.800	28.58	31.55	14.27	123.3	128.1	47.80	6.40	58.55	453.6103091	562.4	22.90
C08A-3	C40-3	12.700	7.95	7.85	3.96	45.4	47.6	12.00	1.50	14.38	42.39614	50.0	2.14
C10A-3	C50-3	15.875	10.16	9.40	5.08	57.0	59.5	15.09	2.03	18.11	66.615136	77.8	3.62
C12A-3	C60-3	19.050	11.91	12.57	5.94	71.5	73.9	18.00/18.20	2.42	22.78	95.421682	111.1	5.365.41
C16A-3	C80-3	25.400	15.88	15.75	7.92	91.7	95.1	24.00	3.25	29.29	170.1/38659	198.4	9.10
C20A-3	C100-3	31.750	19.05	18.90	9.53	112.2	116.3	30.00	4.00	35.76	265.5/60341	309.6	13.60
C24A-3	C120-3	38.100	22.23	25.22	11.10	141.4	145.2	35.70	4.80	45.44	381.086591	437.2	20.43
C28A-3	C140-3	44.450	25.40	25.22	12.70	152.2	156.8	41.00	5.60	48.87	517.2117545	593.3	25.23
032A-3	C160-3	50.800	28.58	31.55	14.27	181.8	186.6	47.80	6.40	58.55	680.4154636	780.6	34.19

► B 系列直板滚子链条
Roller chain with straight side plates (B series)


双节距输送链 ◀
Double pitch conveyor chain

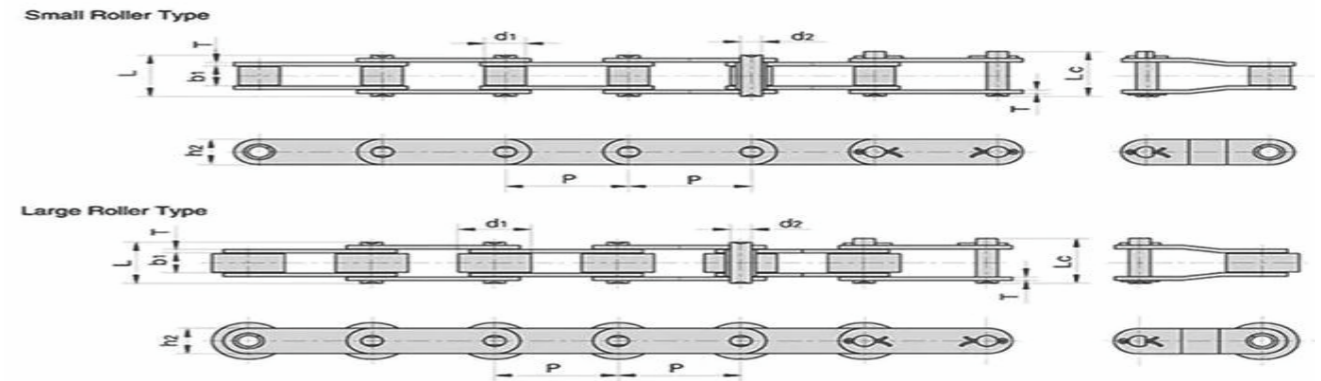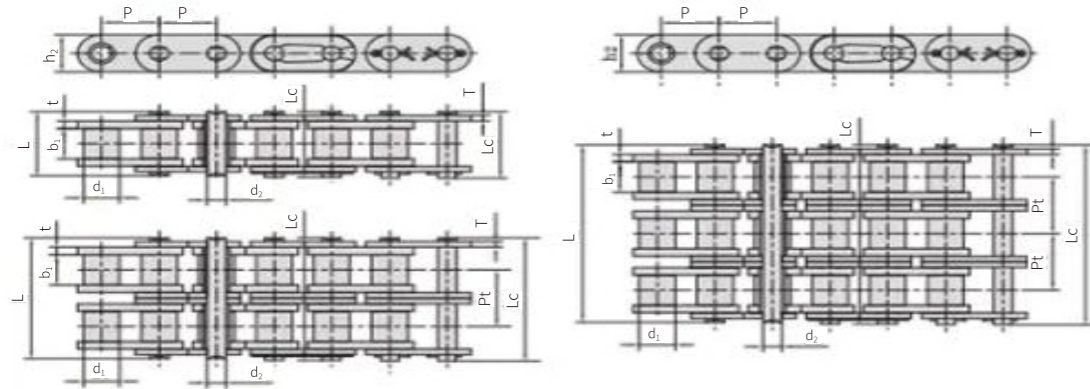

链号 Chain NO.	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between inner plates	销轴直径 Pin Diameter	销轴长度 Pin Length		内链板高度 Inner plate depth	链板厚度 Plate thickness	排距 Tran sverse pitch	抗拉强度 tensile strength	平均拉伸 负荷 AveRage tensile strength	每米长重 Weight per meter
					L	lc						
					max	max						
C08B-1	12.700	8.51	7.75	4.45	16.7	18.2	11.8	1.60	-	18.0/4091	19.5	0.80
C10B-1	15.875	10.16	9.65	5.08	19.5	20.9	14.7	1.70	-	22.4/5091	27.9	1.06
C12B-1	19.050	12.07	11.68	5.72	22.5	25.2	16.0	1.85	-	29.0/6591	32.2	1.32
C16B-1	25.400	15.88	17.02	8.28	36.1	39.1	21.0/24.0	4.15/3.1	-	60.0/13636	72.8	3.08/3.49
C20B-1	31.750	19.05	19.56	10.19	41.3	45.0	26.4	4.5/3.5	-	95.0/21991	106.7	4.16
C24B-1	38.100	25.40	25.40	14.63	53.4	57.8	33.2	6.0/4.8	-	160.0/36364	178.0	7.47
C28B-1	44.450	27.94	30.99	15.90	65.1	69.5	36.7	7.5/6.0	-	200.0/45455	222.0	9.90
C32B-1	50.800	29.21	30.99	17.81	66.0	71.0	42.0	7.0/6.0	-	250.0/56818	277.5	10.45
C08B-2	12.700	8.51	7.75	4.45	31.2	32.2	11.8	1.60	13.92	32.0/7273	38.7	1.45
C10B-2	15.875	10.16	9.65	5.08	36.1	37.5	14.7	1.70	16.59	44.5/10114	57.8	2.00
C12B-2	19.050	12.07	11.68	5.72	42.0	44.7	16.0	1.85	19.46	57.8/13136	66.1	2.62
C16B-2	25.400	15.88	17.02	8.28	68.0	71.0	21.0/24.0	4.15/3.1	31.88	106.0/24091	133.0	6.10/6.92
C20B-2	31.750	19.05	19.56	10.19	77.8	81.5	26.4	4.5/3.5	36.45	170.0/38636	211.2	8.23
C24B-2	38.100	25.40	25.40	14.63	101.7	106.2	33.2	6.0/4.8	48.36	280.0/63636	319.2	14.77
C28B-2	44.450	27.94	30.99	15.90	124.6	129.1	36.7	7.5/6.0	59.56	360.0/81818	406.8	19.82
C32B-2	50.800	29.21	30.99	17.81	124.6	129.6	42.0	7.0/6.0	58.55	450.0/102273	508.5	20.94
C08B-3	12.700	8.51	7.75	4.45	45.1	46.1	11.8	1.60	13.92	47.5/10795	57.8	2.10
C10B-3	15.875	10.16	9.65	5.08	52.7	54.1	14.7	1.70	16.59	66.7/15159	84.5	2.87
C12B-3	19.050	12.07	11.68	5.72	61.5	64.2	16.0	1.85	19.46	86.7/19705	101.8	3.89
C16B-3	25.400	15.88	17.02	8.28	99.8	102.9	21.0/24.0	4.15/3.1	31.88	160.0/36364	203.7	9.12/10.34
C20B-3	31.750	19.05	19.56	10.19	114.2	117.9	26.4	4.5/3.5	36.45	250.0/56818	290.0	11.34
C24B-3	38.100	25.40	25.40	14.63	150.1	154.6	33.2	6.0/4.8	48.36	425.0/96591	493.0	22.10
C28B-3	44.450	27.94	30.99	15.90	184.2	188.7	36.7	7.5/6.0	59.56	530.0/120454	609.5	29.64
C32B-3	50.800	29.21	30.99	17.81	183.2	188.2	42.0	7.0/6.0	58.55	670.0/152273	770.5	31.27

Chain NO.	ANSI Chain No.	Pitch	Roller Diameter	Width between inner plates	Pin Diameter	Pin Length		Inner plate depth	Plate thickness	Ultimate tensile strength	Average tensile strength	Weight per meter
						L	lc					
						max	max					
C208A C208AL	C2040 C2042	25.40	7.95 15.88	785	3.96	16.6	17.8	12.0	1.50	14.13205	16.7	0.50 0.84
C208AH	C2040H	25.40	7.95	7.85	3.96	18.8	19.9	12.0	2.03	14.1/3205	17.2	0.65
C208B C208BL		25.40	8.51 15.88	7.75	4.45	16.7	18.2	11.8	1.60	18.04091	19.4	0.55 0.89
C210A C210AL	C2050 C2052	31.75	10.16 19.05	9.40	5.08	20.7	22.2	15.0	2.03	2225045	28.1	0.78 1.27
C212A C212AL	C2060 C2062	38.10	11.91 22.23	1257	594	25.9	27.7	18.0	2.42	31.87227	36.8	1.12 1.61
C212AH C212AHL	C2060H C2062H	33.10	11.91 22.22	1257	5.94	292	31.6	18.0	3.25	31.8/7227	41.6	1.44 2.07
C216A C216AL	C2080 C2082	50.80	15.88 28.58	15.75	792	327	36.5	24.0	3.25	56712886	65.7	2.08 3.12
C216AH C216AHL	C2080H C2082H	50.80	15.88 28.58	15.75	7.92	362	39.4	24.0	4.00	56.7/12896	70.0	2.54 3.58
C220A C220AL	C2100 C2102	63.50	19.05 39.67	18.90	9.53	40.4	44.7	30.0	4.00	88.520114	102.6	3.01 4.83
C220AH C220AHL	C2100H C2102H	63.50	19.05 39.67	18.90	9.53	43.6	46.9	30.0	4.80	88.520114	112.4	3.56 5.38
C224A C224AL	C2120 C2122	76.20	22.23 44.45	25.22	11.10	503	54.3	35.7	4.80	127.028864	147.3	4.66 7.66
C224AH C224AHL	C2120H C2122H	7620	22.23 44.45	25.22	11.10	53.5	57.5	35.7	5.60	127.028864	160.9	5.26 8.26
C232A C232AL	C2160 C2162	101.60	28.59 57.15	31.75	1427	62.7	69.6	478	6.40	226.851545	278.9	8.15 13.00
C232AH C232AHL	C2160H C2162H	101.60	28.58 57.15	31.75	14.27	76.4	73.0	47.8	7.20	226.851545	285.8	9.06 13.84

▶ 不锈钢滚子链条 Stainless steel roller chain

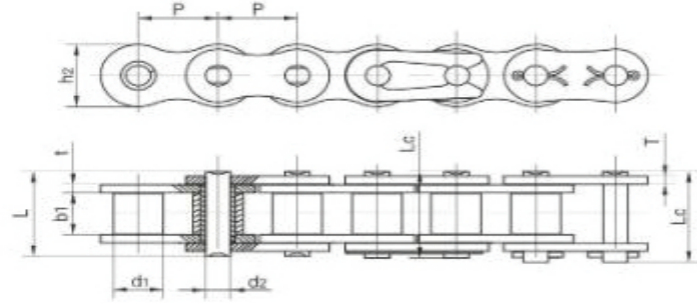


链号 Chain NO.	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between inner plates	销轴直径 Pin Diameter	销轴长度 Pin Length		内链板高度 Inner plate depth	链板厚度 Plate thickness	破裂负荷 Breaking load	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	L max	lc max	h2 max	T max	Q	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN	kg/m
25SS	6.350	3.30	3.18	2.31	7.9	8.4	6.00	0.8	2.5/568	0.15
"35SS	9.525	5.08	4.77	3.58	12.4	13.17	9.00	1.30	55/1250	0.33
40SS	12.700	7.95	7.85	3.96	16.6	17.8	12.00	1.50	9.6/2182	0.63
41SS	12.700	7.77	6.25	3.58	13.5	15.0	9.91	1.30	6.0/1360	0.48
50SS	15.875	10.16	9.40	5.08	20.7	22.2	15.00	2.03	15.2/3455	1.03
60SS	19.050	11.91	12.57	5.94	25.9	27.7	18.00	2.42	21.7/4932	1.51
80SS	25.400	15.88	15.75	7.92	32.7	35.0	24.00	3.25	38.9/8841	2.62
100SS	31.750	19.05	18.90	9.53	40.4	44.7	30.00	4.00	60.0/13630	3.94
120SS	39.100	22.23	25.22	11.10	50.3	54.3	35.70	4.80	72.5/16477	5.72
140SS	44.450	25.40	25.22	12.70	54.4	59.0	41.0	5.60	94.0/21363	7.70
04BSS	6.000	4.00	2.80	1.85	68.0	7.8	5.00	0.60	2.0/455	0.11
05BSS	8.000	5.00	3.00	2.31	82.0	8.9	7.10	0.80	3.5/795	0.20
06BSS	9.525	6.35	5.72	3.28	13.15	14.1	8.20	1.30	6.2/1409	0.41
08BSS	12.700	8.51	7.75	4.45	16.7	18.2	11.80	1.60	12.0/2727	0.70
10BSS	15.875	10.16	9.65	5.08	19.5	20.9	14.70	1.70	14.5/3295	0.94
12BSS	19.050	12.07	11.68	5.72	22.5	24.2	16.00	1.85	18.5/4205	1.16
16BSS	25.400	15.88	17.02	8.28	36.1	37.4	21.00	4.15/3.1	40.0/9091	2.73
20BSS	31.750	19.05	19.58	10.19	41.3	45.0	26.40	4.5/3.5	59.0/13409	3.73
24BSS	38.100	25.40	25.40	14.63	53.4	57.8	33.20	6.0/4.8	104.0/25454	7.20
32BSS	50.800	29.21	30.98	17.81	66.0	71.0	42.00	7.0/6.0	150.0/34090	10.22

▶ 不锈钢空心销轴链 Stainless steel Hollow pin chain


	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between inner plates	销轴直径 Pin Diameter		销轴长度 Pin Length		内链板高度 Inner plate depth	链板厚度 Plate thickness	极限拉伸负荷 Ultimate tensile strength	平均拉伸 负荷 Average tensile strength	每米长重 Weight per meter
	P	d1 max	b1 min	d2 max	d3 max	L max	lc max	h2 max	T max	Q min	Q0	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m
SS08BHPF	12.700	8.51	7.75	6.55	4.50	16.4	17.6	11.80	1.6/1.3	7.8/1766.1	8.47	0.56
SS08BHPF5	12.700	8.51	7.75	6.30	4.50	16.8	18.0	12.00	1.60	6.7/15274	7.42	0.62
SS10BHPF3	15.875	10.16	9.65	7.02	5.13	19.5	20.5	14.70	1.70	7.3/1652.0	8.05	0.86
SS10BHPF4	15.875	10.16	9.50	7.20	5.00	19.8	21.3	14.00	2.031.6	7.0/1590.4	9.80	0.82
SS12BHPF2	19.050	12.07	11.68	8.09	6.00	22.7	23.9	16.10	1.85	9.8/2226.0	11.2	0.82
SS12BHPF3	19.050	12.07	11.70	8.22	5.75	23.6	24.9	16.20	2.421.85	11.2/2545.2	12.6	1.14
SS16BHPF3	25.400	15.88	17.02	11.50	8.20	35.3	37.0	23.20	4.03.1	34.3/7795.2	36.54	2.26
SS16BHPF4	25.400	11.70	13.50	8.00	4.30	28.9	30.2	21.30	3.00	21.0/4772.6	23.10	1.81
SS40HP	12.700	7.95	7.85	5.63	4.00	16.5	17.6	12.00	1.5	7.7/1750.0	8.54	0.54
SS08BHPF7	12.700	8.51	9.20	6.55	4.10	17.8	19.0	11.80	1.6	7.8/1766.1	8.47	0.64
SS08BHP	12.700	8.51	7.75	6.55	4.50	16.4	17.6	11.80	1.30	7.8/1766.1	8.47	0.52
SS50HP	15.875	10.16	9.40	7.03	5.13	20.7	21.9	15.09	2.03	14.0/3181.5	15.82	0.91
SS50HPF4	15.875	10.16	8.80	7.03	5.13	19.9	21.1	15.09	2.03	12.6/2926.0	13.44	0.89
SS50HP-HP	15.875	10.16	9.40	7.03	5.13	22.6	23.7	15.09	2.42	14.0/3181.5	15.82	1.02
SS60HP	19.050	11.91	12.70	8.31	6.00	25.8	26.8	18.00	2.42	16.8/3818.5	18.83	1.29
SS60HPF1	19.050	11.91	12.70	8.31	5.01	25.5	26.8	18.00	2.42	19.6/4454.8	21.63	1.37
SS80HP	25.400	15.88	15.75	11.40	8.05	32.5	33.8	24.00	3.25	35.0/7954.8	36.40	2.26
SS80HPF1	25.400	11.70	13.50	7.80	4.00	27.0	28.4	21.50	2.42	19.2/4365.2	20.51	1.50
SS80HPF2	25.400	15.88	15.75	11.40	8.40	32.5	33.8	24.00	3.25	31.5/7158.9	33.60	2.23
SS80H-HP	25.400	15.88	15.75	11.40	8.05	35.7	37.0	24.00	4.00	35.0/7954.8	36.40	2.63
SS80HPF3	25.400	15.88	15.88	11.40	7.96	32.4	33.8	23.24	3.25	35.0/7954.8	36.40	2.26
SS80HPF4	25.400	11.70	13.50	7.80	4.10	29.0	30.5	21.50	3.00	28.0/6363.7	30.24	1.77
SSHB41.75F5	41.750	17.11	19.90	14.11	10.30	39.0	40.4	25.26	4.00	34.37795.2	37.73	2.11
SSA2080HP	50.800	15.88	15.75	11.40	8.05	32.4	33.8	24.00	3.25	29.6/6730.5	32.27	1.60

空心销轴链
Hollow pin chain

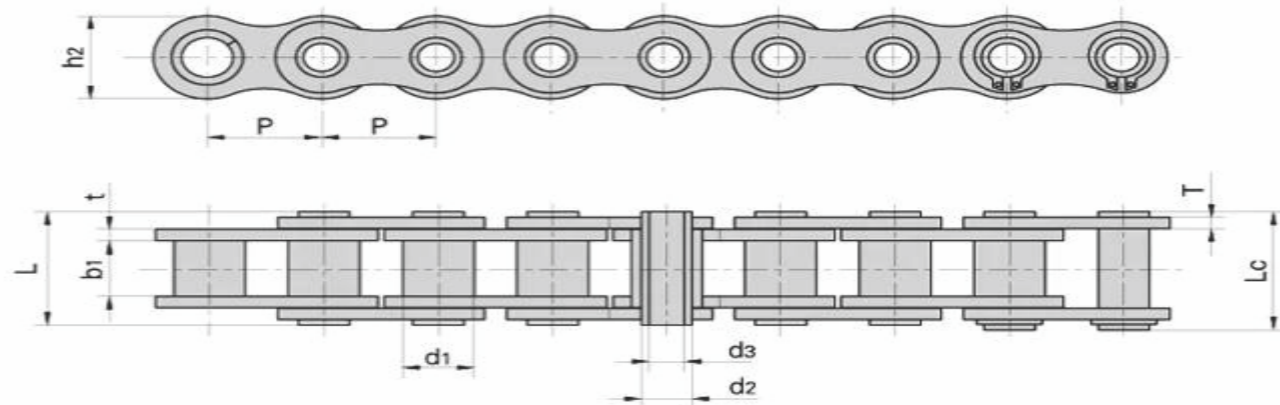


Chain NO.	Pitch	Bush Diameter	Width between inner plates		Pin Diameter		Pin Length		Inner plate depth	Plate thickness	Ultimate tensile strength	Average tensile strength	Weight per meter
	P	d1 max	b1 min	d2 max	d3 max	L max	lc max	h2 max	T max	Q min	Q0	q	
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m	
08BHP	12.700	8.51	7.75	6.55	4.50	16.4	17.6	11.80	1.6/1.3	11.12523	12.1	0.56	
08BHP5	12.700	8.51	7.75	6.30	4.50	16.8	18.0	12.00	160	9.6/2182	10.6	0.62	
10BHP3	15.875	10.16	9.65	7.02	5.13	19.5	20.5	14.70	1.70	10.02272	11.5	0.86	
10BHP4	15.875	10.16	9.50	7.20	5.00	19.8	21.3	14.00	2.03/1.6	12.52840	14.0	0.82	
12BHP2	19.050	12.07	11.68	8.09	6.00	22.7	23.9	16.10	1.85	14.0/3180	16.0	0.82	
128HP3	19.050	12.07	11.70	8.22	5.75	23.6	24.9	16.20	2.42/1.85	16.03636	18.0	1.14	
40HP	12.700	7.95	7.85	5.63	4.00	16.5	17.6	12.00	1.50	110/2500	12.2	0.54	
50HP	15.875	10.16	9.40	7.03	5.13	20.7	21.9	15.09	2.03	20.0/4545	22.6	0.91	
60HP	19.050	11.91	12.70	8.31	6.00	25.8	26.8	18.00	2.42	24.0/5455	26.9	1.29	
60HP1	19.050	11.91	12.70	8.31	5.01	25.5	26.8	18.00	2.42	28.0/6364	30.9	1.37	
80HP	25.400	15.88	15.75	11.40	8.05	32.5	33.8	24.00	3.25	50.0/11364	52.0	2.26	

空心销轴链
Hollow pin chain

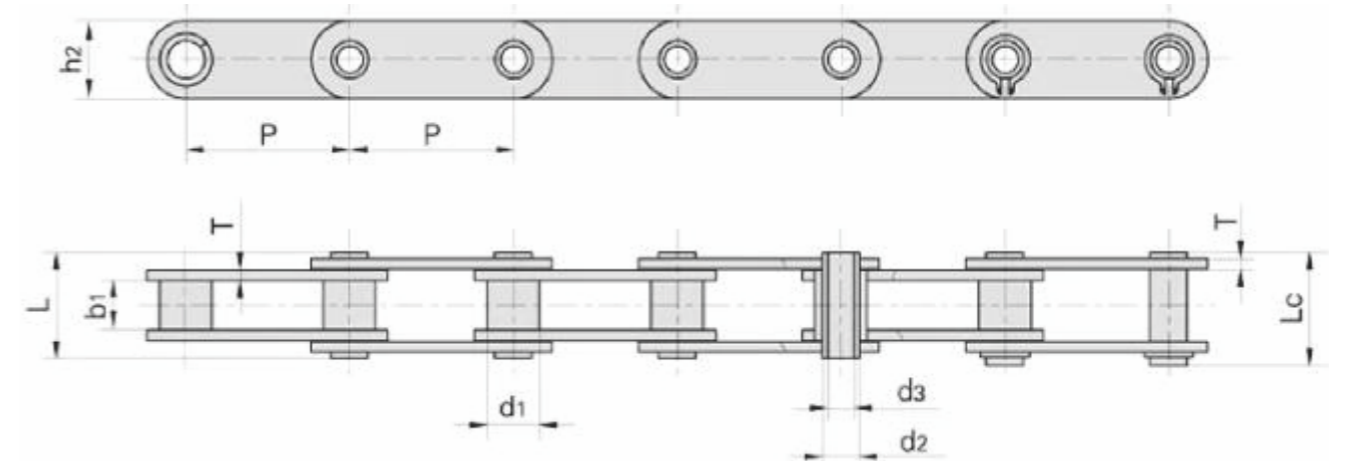

Chain NO.	Pitch	Bush Diameter	Width between inner plates		Pin Diameter		Pin Length		Inner plate depth	Plate thickness	Ultimate tensile strength	Average tensile strength	Weight per meter
	P	d1 max	b1 min	d2 max	d3 max	L max	lc max	h2 max	T max	Q min	Q0	q	
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m	
C2040HP	25.400	7.95	7.85	5.63	4.00	16.5	17.6	12.00	1.50	11.0/2500	12.6	0.46	
C2050HP	31.750	10.16	9.40	7.22	5.12	20.5	21.8	15.00	2.03	20.4/4636	22.8	0.76	
C2060HP	38.100	11.91	12.70	8.31	6.00	25.8	26.8	17.00	2.42	24.0/5455	27.1	1.02	
C2080HP	50.800	15.88	15.75	11.40	8.05	32.5	33.8	24.00	3.25	50.0/11364	52.0	1.81	


空心销轴链
Hollow pin chain

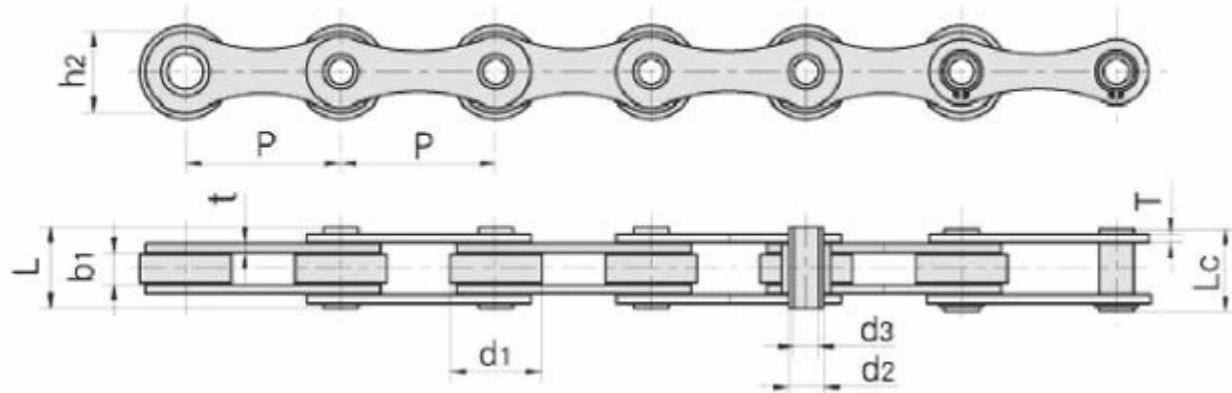

Chain NO.	Pitch	Bush Diameter	Width between inner plates		Pin Diameter		Pin Length		Inner plate depth	Plate thickness	Ultimate tensile strength	Average tensile strength	Weight per meter	Type
	P	d1 max	b1 min	d2 max	d3 max	L max	lc max	h2 max	T max	Q min	Q0	q		
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	kg/m		
HB38.1	38.100	20.00	8.00	8.00	5.30	19.60	20.70	17.30	2.03	28.00/5682	28.80	0.98	B	
HB50.8	50.800	30.00	10.50	11.40	8.20	27.40	28.60	26.00	3.10	50.00/11364	53.60	2.56	B	
HB50.8	50.800	30.00	10.50	11.40	8.20	27.40	28.60	26.00	3.10	50.00/11364	53.60	2.56	B	

重载弯板传动链

Heavy duty cranked-link transmission chain

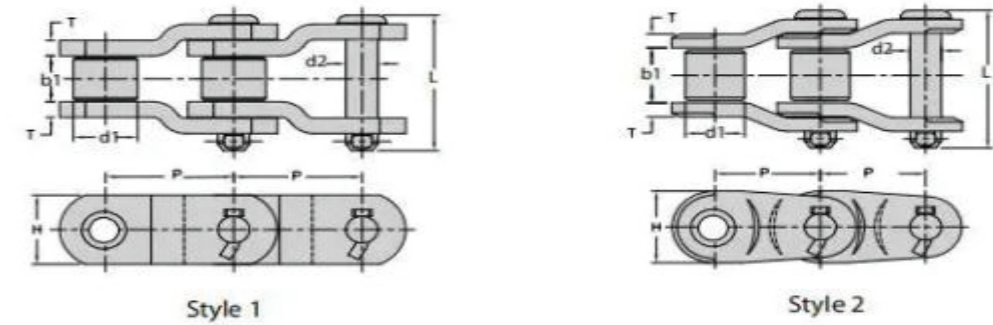

链号 Chain NO.	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between inner plates	销轴直径 Pin Diameter	销轴长度 Pin Length	内链板高度 Inner plate depth	链板厚度 Plate thickness	极限拉伸负荷 Ultimate tensile strength	平均拉伸负荷 Average tensile strength	Type
	P	d1 max	b1 min	d2 max	L max	H max	T max	Q min	Q0	
	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kN	
R3112	50.8	28.7	31.0	14.20	73.9	41.4	6.4	168.9/38385	185.0	1
552065	50.8	28,58	32.50	1.506	79.4	38.0	8.0	2300/52256	250.0	2
2010H	63.5	31,75	318	15.88	97.0	41.5	9,5	250/56815	2750	1
2570H	635	3175	38.10	15.88	99,8	41.3	9.5	2500/56818	270.0	1
2010	63.5	31.75	38.10	15.90	89.0	47.8	7,9	2500/56818	270.0	1
MX5882	66.27	2223	28,58	11.10	68.5	58.5	6.4	1156/26272	1248	1
55588	66.27	2223	28.60	11.11	63.7	28.6	6.4	130.0/29545	144,0	1
MX603	762	*22.5	38.0	1400	88.0	40.0	8.0	147/33408	161,0	1
3011	779	4140	39.60	19.05	100.0	57.0	9,7	3400/77272	367,2	1
2512	779	4140	39.60	19.05	103.4	60.5	9,7	4820/110000	420.0	1
MX53075	7810	3175	38.10	16.46	93.5	44.5	9.7	3340/75909	360,7	1
40HYP	78.10	3175	38.10	15.88	97.0	41.5	9.5	2500/56818	280.0	2
WG78.18	78.18	33,00	38,10	17.00	97.0	45.0	10.0	250,0/56818	280.0	1
7900	7900	31.50	39.00	18.50	93.5	54.0	9,5	471,0/105955	507,6	1
2814	88.90	4445	38.10	22.23	1176	60.0	12,7	240/54545	260,0	1
WB9525	95.25	45.00	39.00	23.00	1240	65.0	16.0	1600/36363	170,6	1
1244	103.20	44.45	48.00	22.00	123.5	55.0	13.0	4760/108180	514.0	1
1244H	103.20	4445	49.20	23.90	1290	60.0	14.0	6664/151450	700.0	1
3315	103.45	45.24	49.30	23.85	130.0	63.5	14,2	5500/125000	594.0	1
SH1245	1035	45.3	49,6	23.80	130.0	60.0	14.5	722/164084	794.0	2
3618	114.30	57,15	52.30	27,97	138.0	79,2	14,2	760,0/172727	820,8	1
RO1205	127.0	63,5	65.0	31,75	147.6	82.5	14,2	872/198177	9550	2
4020	127.00	63.50	69.90	31,78	165.7	91,9	15,7	987,0/224300	10692	1
5035	12700	63,50	65.00	34.90	168.0	88,9	19,0	1250,0/284065	12200	1
4824	15240	76,20	76,20	38.10	182.3	104.6	19.0	1645,0/373860	17550	1
6555	165.10	88.90	81.00	44.45	202.4	127.0	22,35	1650,5/375000	1765.0	2
5628	177.80	88.90	82.60	44.45	202.4	133.4	22,4	1694,5/385000	18100	1,2