


# wiper A61

## seal spec

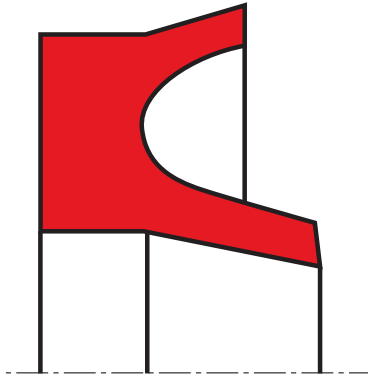

### description

wiper seal with Polyamide (PA) material.

### application



### category of profile

machined or molded/standard/trade product.

### single acting

### operating parameters & material

material	temperature	max. surface speed
s-mart POM/PA	-40°C ... + 100°C	4,0 m/s

*the stated operation conditions represent general indications. it is recommended not to use all maximum values simultaneously. surface speed limits apply only to the presence of adequate lubrication film.*

### surface quality


surface roughness	Ra (µm)
sliding surface	according to seal data
bottom of groove	≤ 2.5
groove face	≤ 4.0

### tolerance recommendation

seal housing tolerances	
D	H10

**seal & housing recommendations**

*please note that we are able to produce those profiles to your specific need or any non standard housing. for detail measurements, please see seal-mart catalog...*

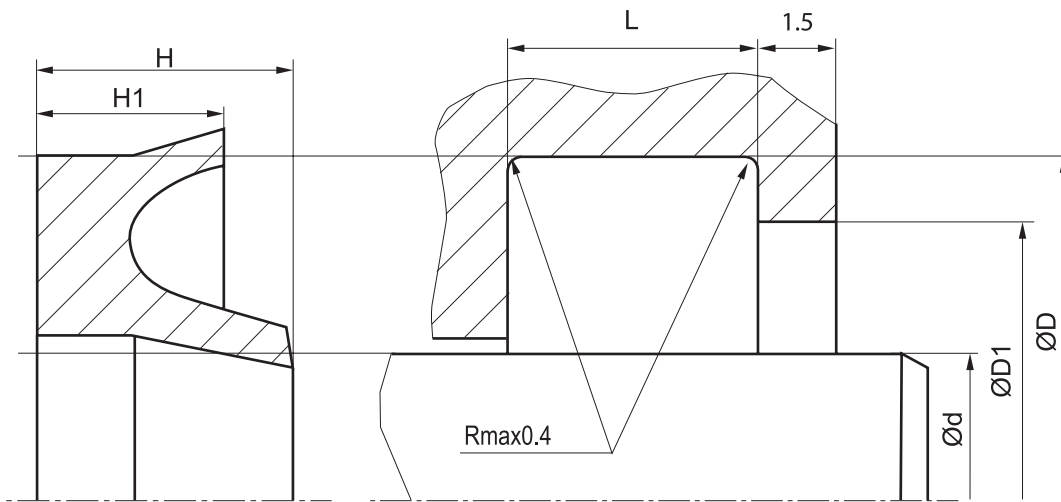

*don't hesitate to contact our technical department for further information or for special requirements (temperature, speed etc.), so that suitable materials and/or designs can be recommended.*